On November 22, 2019, CO₂ injection of this demonstration project was suspended. Cumulative CO₂ Injection amount

300,110.3

What's New

Japan CCS exhibited at Hokkaido Business EXPO

The 34th Hokkaido Business EXPO, one of the biggest business events in Hokkaido was held in Sapporo from November 5~6, 2020.

In light of the Covid-19 situation, the event was held in a hybrid physical/virtual form in line with the "New Hokkaido Style".

الخصيران فراج الخصيران محققا والتلاحية والتلاحية والم


<image>

المريح المريح المحمد المريح المحمد الم

Japan CCS exhibited a "physical" booth with panels and pamphlets, was able to reach out to many people about CCS!



Global warming continues

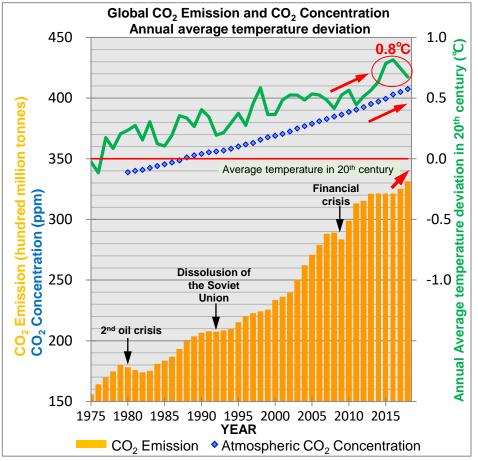

Source: Created by JCCS from the documents of Global Energy & CO2 Status Report 2018 (IEA, 2019), NOAA, Japan Meteorological Agency



The increase in the concentrations of greenhouse gases in the atmosphere is said to be the cause of global warming. In particular, the effect of carbon dioxide (CO_2) is large.

Global CO_2 emissions have been on the rise since the Industrial Revolution, and as a result, CO_2 concentrations in the atmosphere have increased as well as global average annual temperatures.

In Japan, the number of days of heavy rain and hot days shows an increasing trend, which may be the effect of global warming.

2/19


Cumulative CO₂ Injection amount

300,110.3

tonnes

Cumulative CO₂ Injection amount 300,110.3

To reduce greenhouse gas emissions

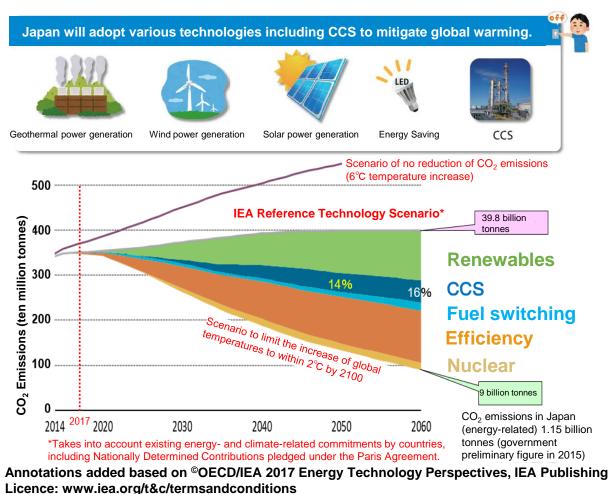

In order to drastically reduce greenhouse gas emissions, it is necessary to employ all mitigation measures including the expanded use of renewable energy, the promotion of efficiency and CCS.

To keep the increase of global average temperature to within 2°C over the period to 2100, carbon dioxide (CO_2) emissions in the second half of this century need to be net-zero, and the cumulative contribution of CCS (indicated in blue in the figure) in CO₂ reductions over the period to 2060 will be 14%, and 16% in the year 2060.


 $\begin{array}{c} \text{Cumulative CO}_2 \text{ Injection amount}\\ \textbf{300,110.3} \end{array}$

tonnes

What is CCS?

والمراجع ويقومها والمعوقان المعود العربية والمعود المتعوق والمعوق ومناه المعوق والمعوق والمعوق

Carbon dioxide Capture and Storage

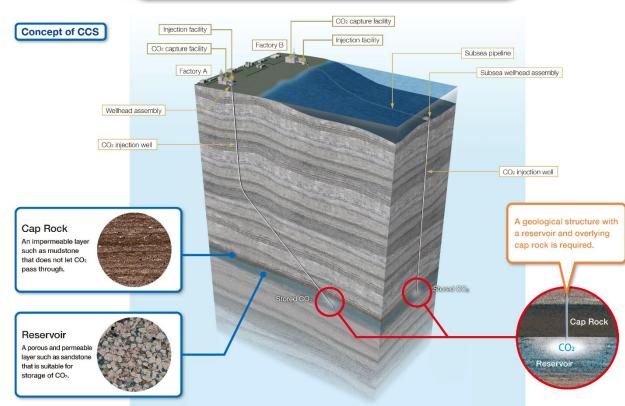


CCS is a technology to prevent carbon dioxide (CO₂) released into the atmosphere emitted by facilities such as power plants and factories. The technology involves capturing the CO₂, injecting it into underground geological formations and storing it permanently. Along with energy efficiency and renewable energy, CCS helps to tackle global warming.

 $\begin{array}{c} \text{Cumulative CO}_2 \text{ Injection amount}\\ \textbf{300,110.3} \end{array}$

tonnes

How to store CO₂

والمتحمية ومحالي المتحمية ومحالي المحملة ومحالي المتحمية ومحالي المتحالي ا

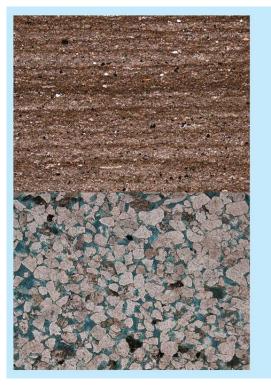

Features of Caprock Mudstone etc., made of fine mud grains

Impervious

· Sufficient blocking ability

Covering reservoir layer widely and thickly

Features of Reservoir

Sandstone, volcanic rock, etc., made of coarse grains


Sufficient pore spaces to store CO2
Pervious

In order to store CO_2 in the subsurface under the seabed, a geological structure where a reservoir is overlain by a cap rock is required. The cap rock blocks the leakage of injected CO_2 from the reservoir.

On November 22, 2019, CO₂ injection of this demonstration project was suspended. $\begin{array}{c} \text{Cumulative CO}_2 \text{ Injection amount}\\ \textbf{300,110.3} \end{array}$

tonnes

Flow Scheme of Tomakomai CCS Demonstration Project

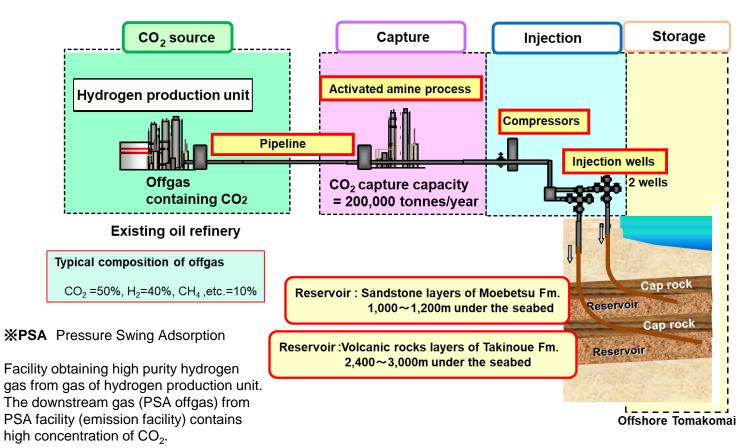

 CO_2 is captured from the offgas containing CO_2 generated by a hydrogen production unit of a refinery, pressurized (up to 23 MPa) to the pressure required for injection, injected at a scale of about 100,000 tonnes of CO_2 per year and stored in two subseabed reservoirs offshore Tomakomai.

Source: Edited from the demonstration test plan at Tomakomai site, Ministry of Economy, Trade and Industry

وخديم الترجيل والخط الترجيل فجري الخصيصان

300,110.3


Schedule of Tomakomai Project

■ From JFY2012 to JFY2015 : Preparation, Construction

Activities including the design and construction of facilities, drilling of injection wells (to inject CO₂ into the subsurface), and preparation for demonstration operation were carried out.


From JFY2016 to JFY2020 : Injection, Monitoring

On April 1, 2016, Japan CCS Co., Ltd. was commissioned by METI to conduct "Tomakomai CCS Demonstration Project (JFY2016)", and commenced CO_2 injection on April 6. On November 22, 2019, the target of 300,000 tonnes of CO_2 injection was achieved, and injection was terminated. The monitoring of CO_2 is being continued.

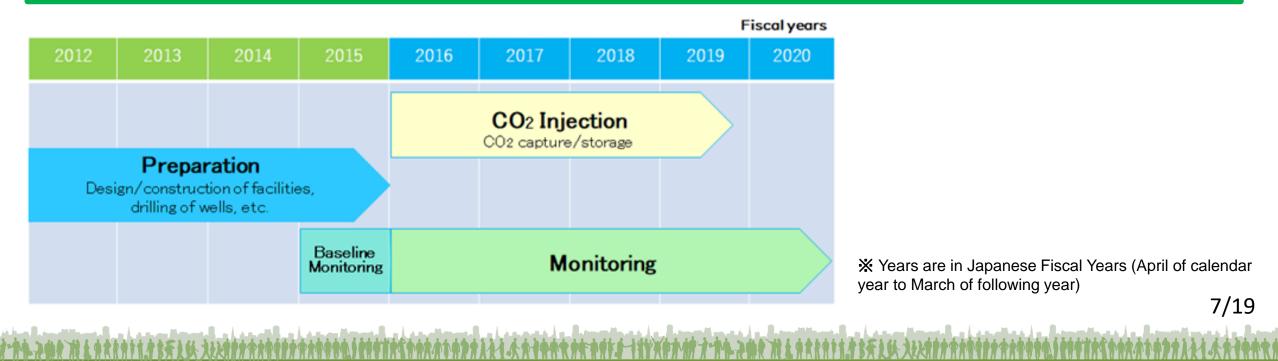

Cumulative CO₂ Injection amount **300,110.3**

Positional Relation of Onshore Facilities

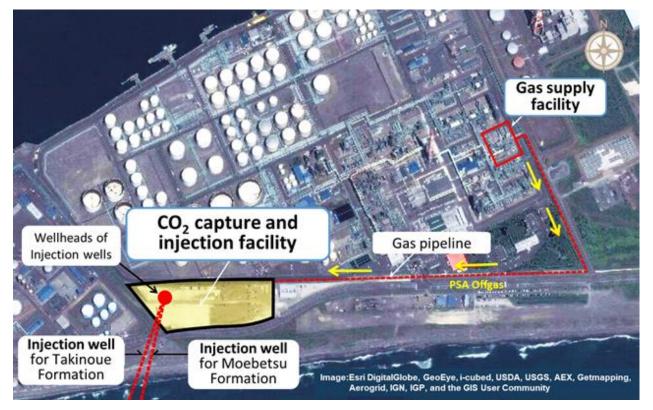


والبواعية والمستراب المتحدين والمسترابية والمسترا والمسترا والترجية والمسترابي

In the "Gas supply facility", PSA offgas (CO_2 containing gas) is generated in the hydrogen production process of the refinery and sent to the Tomakomai Project "Capture and injection facility" via a 1.4 km gas pipeline.

At the "Capture and injection facility", CO_2 is captured at purity of 99% or more from the PSA offgas sent through the Gas pipeline, pressurized by compressors, and injected by 2 injection wells into offshore sub-seabed reservoirs for storage.

Cumulative CO₂ Injection amount **300,110.3**

Schematic Geological Section

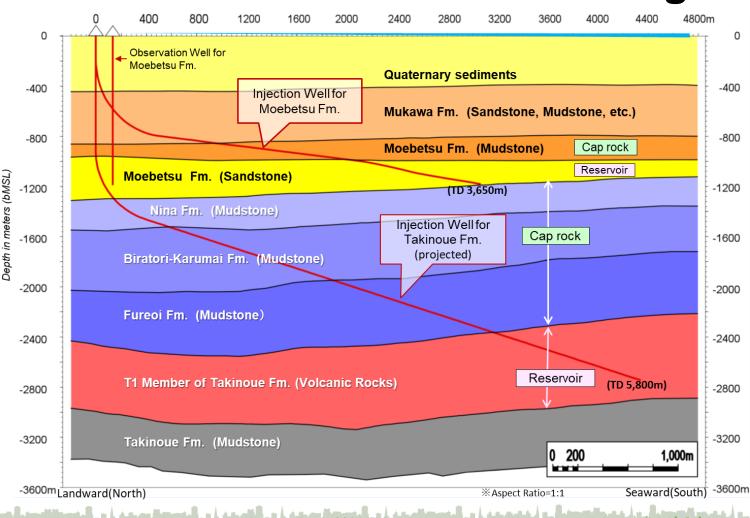

This is a schematic geological section showing how the CO_2 is injected by two injection wells extending to the two reservoirs, the Takinoue Formation T1 Member (volcanic rocks) and Moebetsu Formation (sandstone).


The Takinoue Formation injection well is a directional well with a total depth of 5,800m and maximum inclination of 72 degrees. The Moebetsu Formation injection well is a directional well with a total depth of 3,650m and maximum inclination of 83 degrees.

الروار فمطلقه وبالروار فمالمحفرا وبالبه والاستخبار ور

On November 22, 2019, CO₂ injection of this demonstration project was suspended. Cumulative CO₂ Injection amount

300,110.3

Bird's Eye View of Capture and Injection Facilities

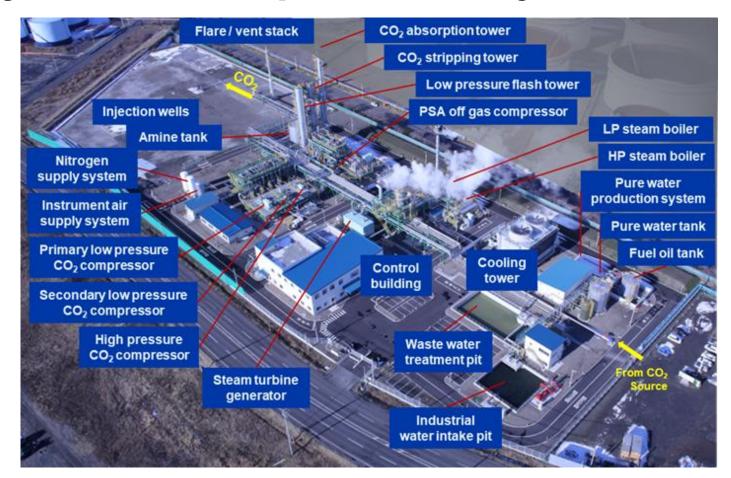

10/19

Copyright (C) 2009-2020 Japan CCS Co., Ltd All rights reserved.

3 stage CO₂

the pressure

Compressors

Increases pressure of captured CO_2 to

required for injection

On November 22, 2019, CO₂ injection of this demonstration project was suspended. Cumulative CO₂ Injection amount


300,110.3

CO₂ Capture Facilities and Compressors




CO₂ Capture Facility Captures CO₂ from PSA Offgas

CO₂ Injection Report

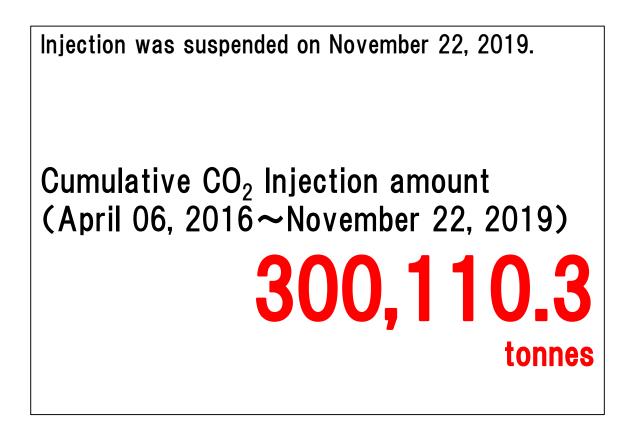


البيان فمرجع فيصحبان والبقيم الموافق ومنابع الموصوق وبالمصوفا وبالقوم والمراقع والموصوق والمصوق ومرفيا وال

Injection Amount in November 2019

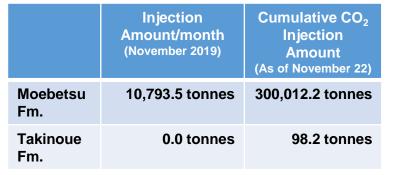

Change of cumulative CO₂ Injection Amount

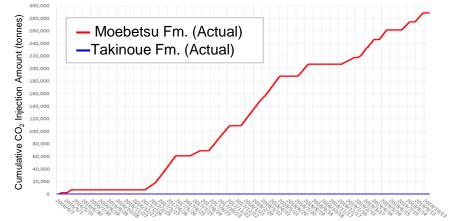


12/19

Copyright (C) 2009-2020 Japan CCS Co., Ltd All rights reserved.

Cumulative CO2 Injection amount

300,110.3

Layout of Monitoring Network

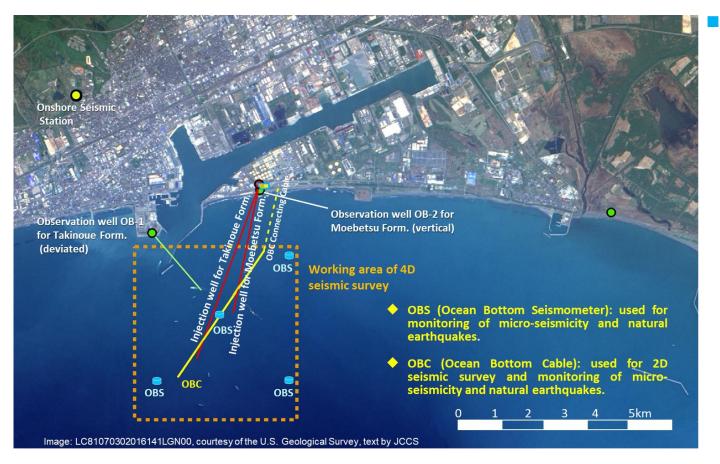


المستنافين المتحد المحدار والمستناء والمحجدان المستناصية المستنصبين والمستنصبين والترجيات المستناد

- A monitoring network was constructed near and around the CO_2 injection point, and continuous monitoring over six years comprising before CO_2 injection (1 year), during CO_2 injection (3 years) and after termination of injection (2 years) is being carried out.
 - The formation pressures and temperatures of the wells - observation wells (3 wells) drilled around the CO₂ injection point and CO₂ injection wells (2 wells) are being monitored.
 - Seismometers were installed in the observation well and on the seabed to monitor earthquakes (including micro-seismicity - minute tremors that cannot be felt by humans).
 - Observed data is controlled centrally at the Tomakomai Demonstration Center and constant monitoring for the presence of abnormal conditions is carried out.

tonnes

The most recent noticeable tremors observed in Tomakomai

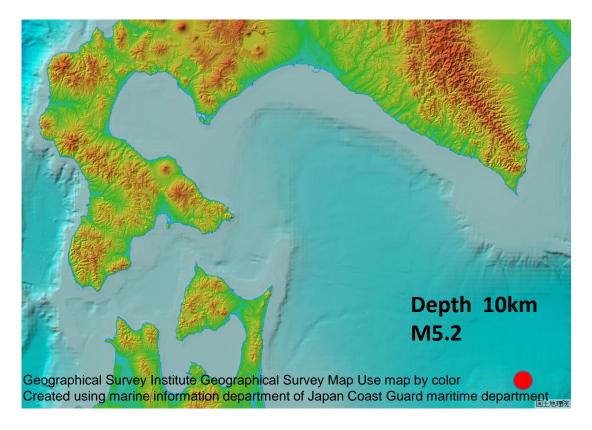

ويحتار والخو والججرار والخص وخاري الخوج المحاج المحجزا والخوج فالمراقع وخاري الخوجان

Observation record of Onshore Seismometer

Observation record at Midorigaoka Park

陸上設置地設	震計 抽出期間 2020/11/07 C	02:17 - 2020/11/07 02:20	1				
[Wiggle]	Ch:X						
	Ch:Y	CONTRACTOR DESCRIPTION		dida hadi ya anya waa amara	amaly and the second		
	Ch:Z	- construction	and the second	all and a shift of the second s	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	······································	
35)	2020/11/07 02:17:00	02:17:30	02:18:00	02:18:30	02:19:00	02:19:30	2020/11/07 02:20:00


Earthquake Information Announced by the Japan Meteorological Agency

Time & Date	02:17 (JST) 07 Nov, 2020								
Hypocenter	Lat. 40° 54'N Lon. 143° 18'E Depth 10km								
Magnitude	5.2								
Seismic Intensity at Tomakomai-city	1								


Cumulative CO2 Injection amount


300,110.3

Distribution of Natural Earthquakes around Tomakomai

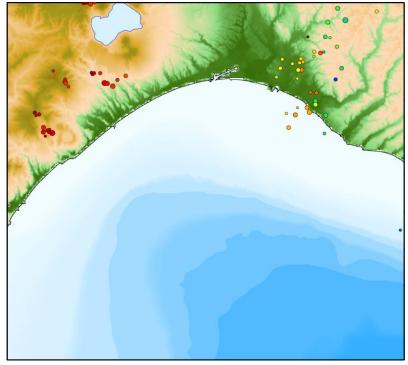

Natural earthquake hypocenter distribution in October 2020



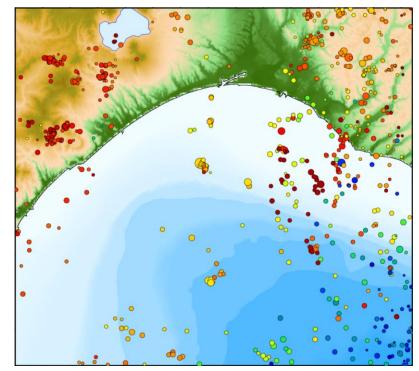

Natural earthquake hypocenter distribution occurred from 2001 to 2010


The hypocenters in the figure is from the JMA Unified Hypocenter Catalog. Earthquakes with the hypocenter depth of 50 km or less are displayed.

Geomorphic map is prepared from Geographical Survey Institute numerical map 250 m mesh (altitude) and Japan Marine Safety Agency 'Japan Oceanographic Data Center' 500 m mesh water depth data 15/19

On November 22, 2019, CO2 injection of this demonstration project was suspended. Cumulative CO2 Injection amount

300,110.3

Micro-seismic events nearby injection point

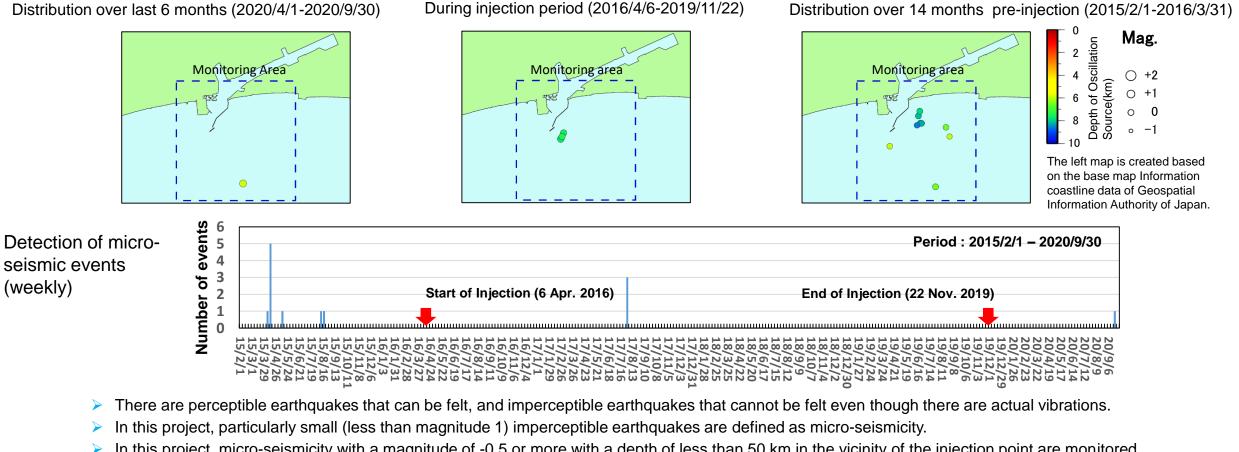


In this project, micro-seismicity with a magnitude of -0.5 or more with a depth of less than 50 km in the vicinity of the injection point are monitored, due to restrictions on the placement of observation points, and constraints on seismograph detection capability, etc.

والمستقيمة والمتحد المحتر والمحتر والمحتر والمتحد والمحتر والمح

On November 22, 2019, CO2 injection of this demonstration project was suspended. Cumulative CO2 Injection amount

300,110.3


Observation of pressure in the wells (October 2020)

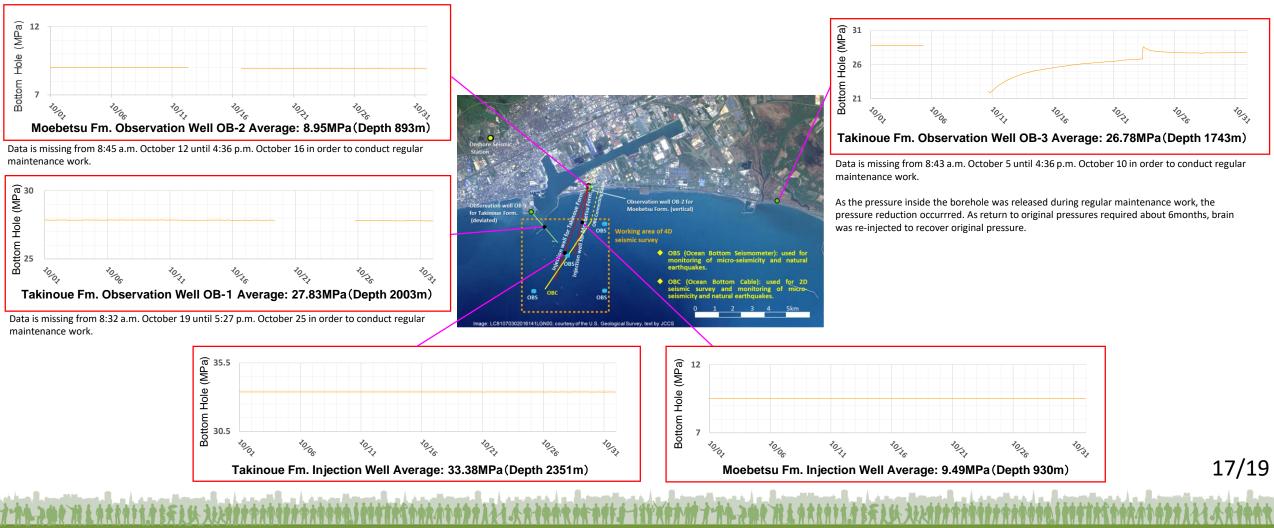

On November 22, 2019, CO2 injection of this demonstration project was suspended. Cumulative CO2 Injection amount

300,110.3


Observation of temperature in the wells (October 2020)

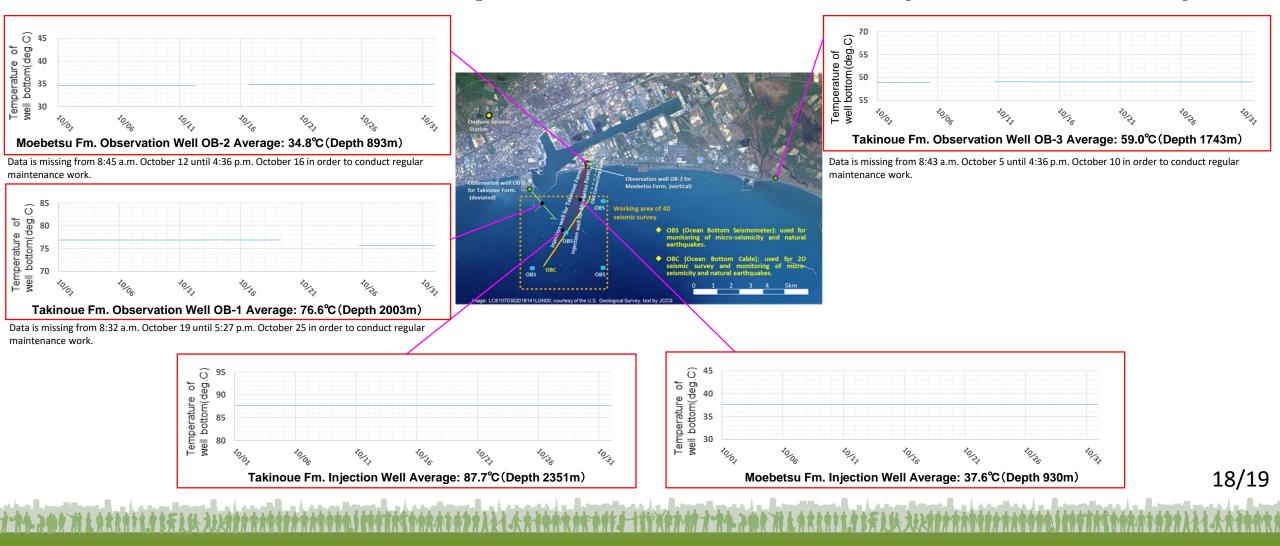

Cumulative CO2 Injection amount

300,110.3

CO₂ Concentration around injection point(seasonal)

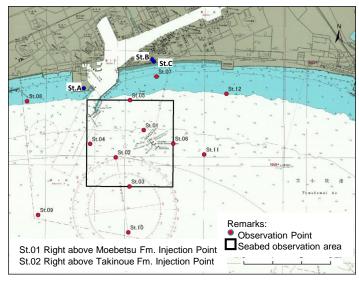

Cruise to the Japan Coast Guard issue navigation chart (W1034)

Seasonal observation of CO_2 concentration is conducted at three onshore points (St.A to C) and 12 offshore points (St.01 to 12). The concentration of CO_2 is indicated as

Volume ratio (unit: ppm) at the onshore observation points, and as partial pressure (unit: μ atm) at the offshore points. The figures of the offshore points are based on the measurement at 2 meters above the seabed.

	2013				2014				2015			2016				2017				2018				2019				
	Spring	Smmr	Fall	Winter																								
St.01		323	425	388	424								372	401		339	228	474	410	403	301	386	348	304	351	402	528	359
St.02		364	432	393	428								475	389		351	255	484	440	399	308	454	371	307	346	415	497	389
St.03		343	410	377	420								477	386		347	254	431	424	390	328	450	355	280	427	415	550	388
St.04		351	399	393	436								432	394		335	239	485	440	395	312	384	355	248	324	428	499	388
St.05		326	352	387	430								370	416		309	247	354	372	369	256	348	356	261	300	360	562	353
St.06		283	417	395	424								411	366		332	259	450	426	390	306	408	356	303	325	435	545	382
St.07		314	353	368	424								358	517		316	273	371	384	366	270	343	355	216	307	364	530	364
St.08		370	349	366	327								360	439		316	277	320	366	375	276	356	327	228	313	409	510	349
St.09		358	395	379	417								437	391		335	276	423	428	391	346	437	369	302	417	407	544	390
St.10		353	395	372	415								477	394		333	266	423	420	374	337	423	353	269	407	412	565	386
St.11		350	415	394	418								443	391		338	264	448	436	384	310	397	353	330	319	408	542	394
St.12		317	377	383	420								334	447		334	252	349	383	389	260	348	344	263	305	400	556	369
St.A					396	379	412	400	397	394	399	424	417	404	407	432	414	404	414	413	411	395	401	419	430	411	454	445
St.B					365	382	405	407	400	394	388	415	411	397	405	417	413	392	408	414	412	395	423	424	425	411	429	444
St.C					403	395	403	403	392	406	396	409	423	410	412	403	413	417	428	417	427	404	421	421	430	414	438	440

* Offshore observation was not conducted in fall 2016. 19/19