

What's New

CCS Forum on “Global Warming and CCS” and site tour will be held on November 14 (Sat).

Invited speakers

Part 1: Naomi HARADA, Ph.D.

Professor, Center for International Collaboration, Atmosphere and Ocean Research Institute,
THE UNIVERSITY OF TOKYO

Theme: Antarctica - its attractiveness and the frontline of global change

Part 2: Mr. Toru Muta

Director, Carbon Dioxide Capture and Storage Policy Office,
Natural Resources and Fuel Department, Agency of Natural Resources and Energy

Theme: Japan's GX/CCS policy and Tomakomai

Date: November 14, 2026 (Sat) from 13:00

Venue: Grand Hotel New Oji

Capacity: 200 persons (first-come-first-served basis)

Registration: free of charge (advance registration is required)

For more information, please visit the website of Japan CCS (in Japanese).

★ Site tour of JAPEx Tomakomai J-2 exploratory drilling site will be held in the morning of
November 14 (limited to first 40 persons)

1-1/19

Talk by the First Female
Leader of Japanese
Antarctica Research
Expedition



Dr. Naomi Harada (in Antarctica)

What's New

On August 6 (Thu), Japan CCS gave a fun class at the 5th “Let’s learn SDGs!” ~ held at Toyota Corolla Tomakomai.

An environmental event on the theme of SDGs and decarbonization was held in Tomakomai City, Hokkaido, and 20 local elementary school students (from 3rd to 6th grade) participated. After an introduction of “Global Warming and CCS” with cartoons, we had the students experience how CCS works using a demonstration model.



Date: August 6, 2026 at Toyota Corolla Tomakomai

- Hosted by The Hokkaido Shimbun Press
- Co-hosted by Toyota Corolla Tomakomai Inc.
- Cooperation by Toyota Motor Hokkaido Inc.,
Japan CCS Co., Ltd., Tomasei Holdings Co., Ltd.,
- Supported by Tomakomai City, Tomakomai
Board of Education



What's New

Japan CCS exhibited a booth at “Kankyo Hiroba Sapporo 2026” on August 1 (Sat) and 2 (Sun).



Families enjoying our booth



A model explaining CCS was very popular among children.


Thank you very much for
visiting our booth.



Carbon dioxide (CO₂) is the most significant greenhouse gas contributing to global warming

● Time-series representation of Globally Averaged CO₂ Mole Fractions

The global mean annual atmospheric CO₂ mole fraction was 420.0 ppm in 2023, an increase of 2.3 ppm from the previous year. This is 51% higher than the pre-industrial level (about 278 ppm).

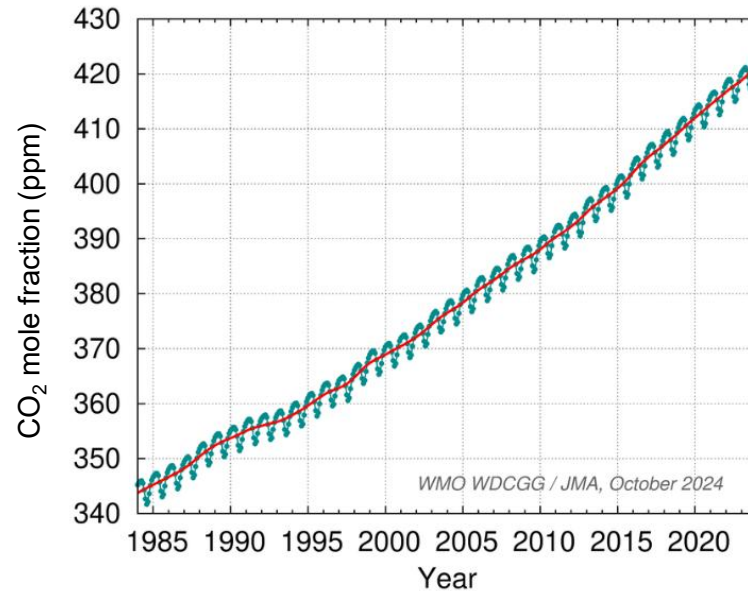


Blue: monthly mean concentration

Red: monthly mean with seasonal variations removed

Source: Japan Meteorological Agency "Globally averaged mole fractions" (updated on March 25, 2025); as modified by Japan CCS Co., Ltd. https://www.data.jma.go.jp/ghg/kanshi/ghgp/co2_e.html

● Annual anomalies of Global Average Surface Temperature

The global average surface temperature is rising while repeatedly experiencing various fluctuations. In particular, since the mid-1990s, there has been an increasing number of years with high temperatures.

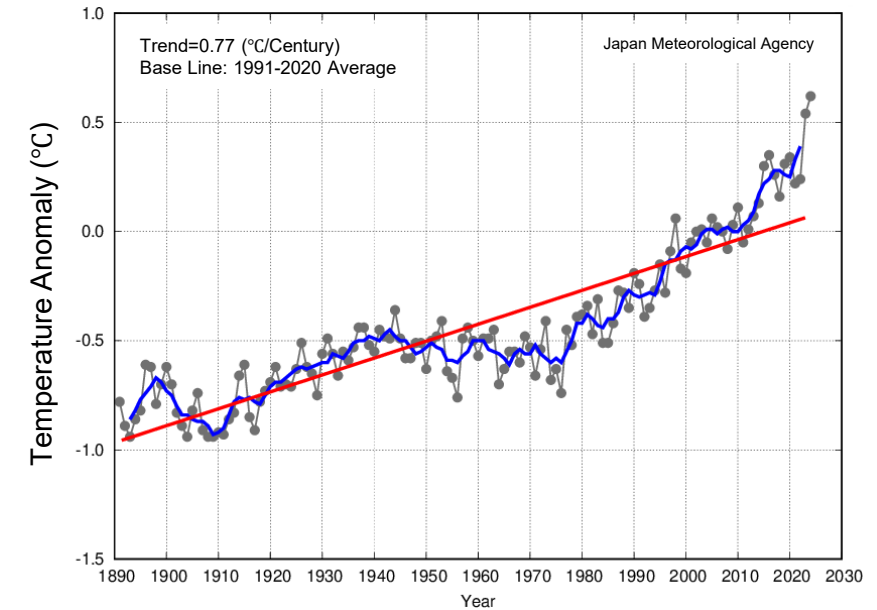

Black thin line: surface temperature anomaly of each year


Blue line: 5-year running mean

Red line: long-term linear trend

Source: Japan Meteorological Agency "Global Average Surface Temperature Anomalies"; as modified by Japan CCS Co., Ltd. https://www.data.jma.go.jp/tcc/tcc/products/gwp/temp/ann_wld.html

Potential of CO₂ reduction by CCUS

■ CO₂ capture amount based on Net Zero Emissions by 2050 Scenario (NZE Scenario)

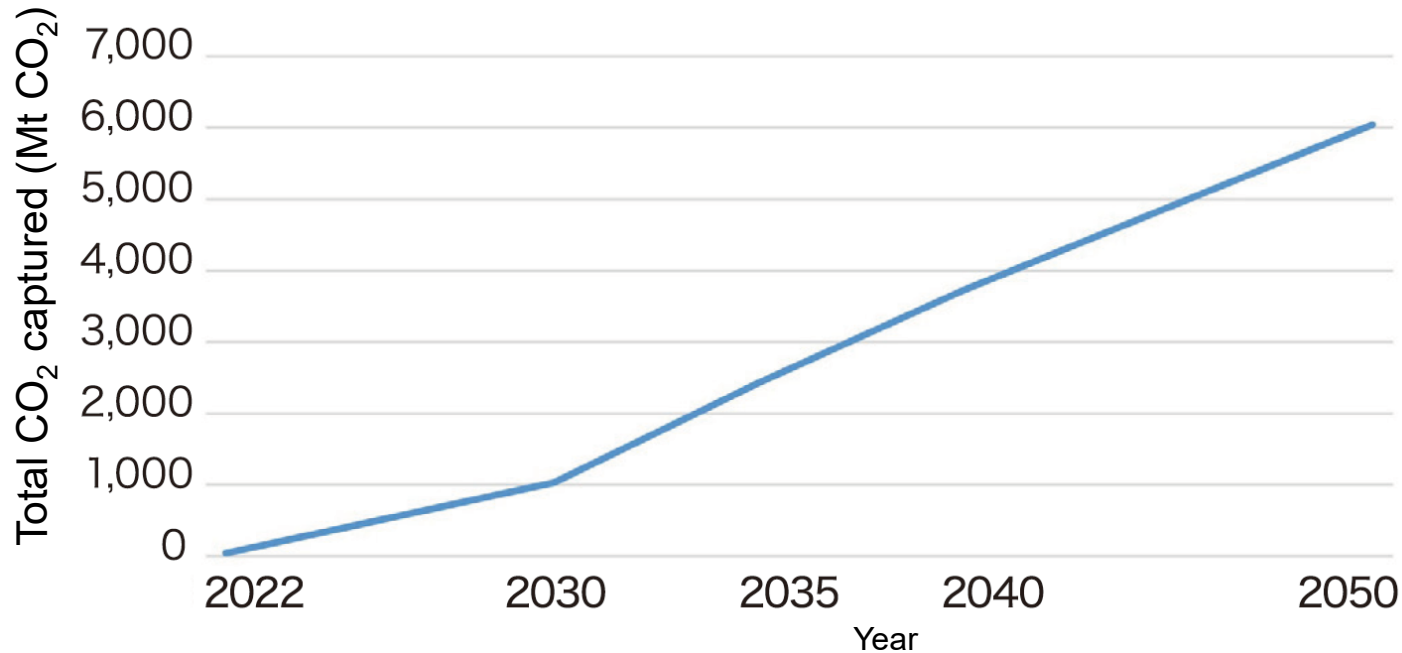


According to the IEA (International Energy Agency), to achieve net zero by 2050, the amount of CO₂ that will need to be captured globally by CCUS is estimated to be approximately 6 billion tonnes per year at that point.

Source: IEA Net Zero Roadmap 2023 "Table A. 4: World CO₂ emissions"; as modified by Japan CCS Co., Ltd.

What is CCS?


Carbon dioxide Capture and Storage

Concept of CCS

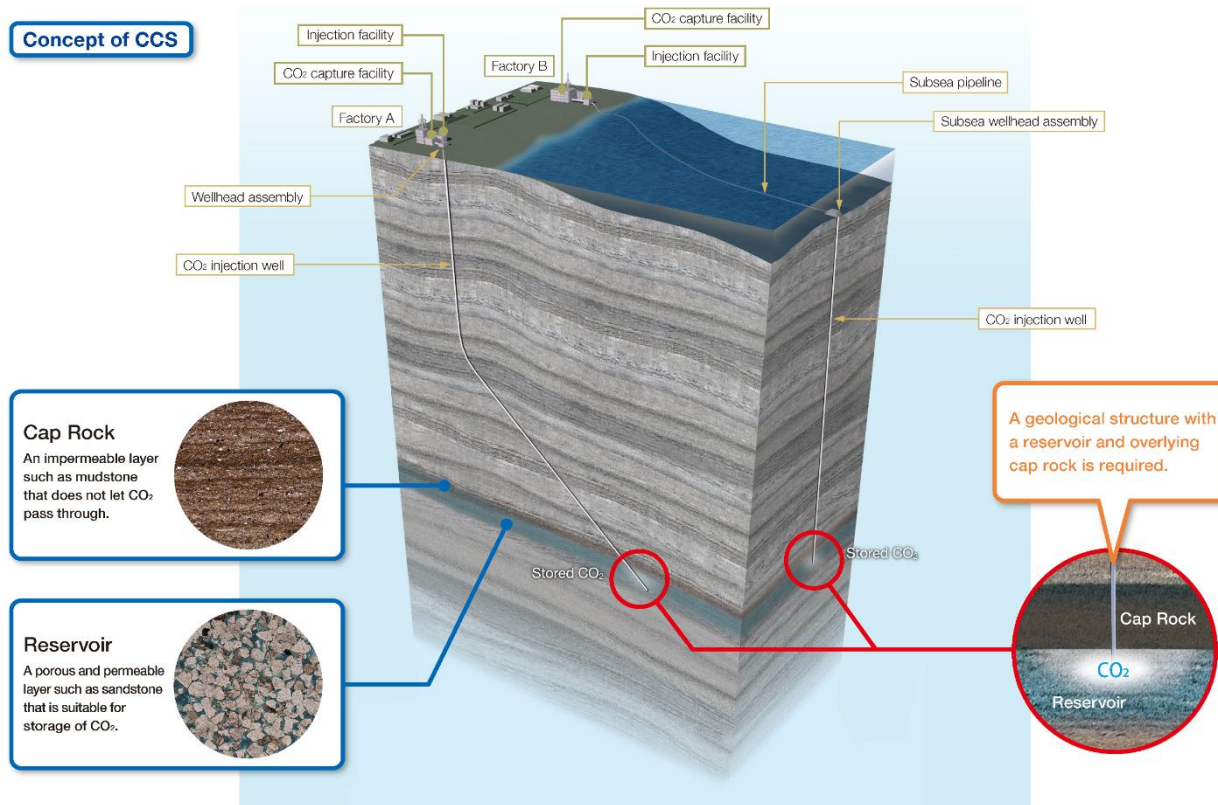

CCS is a technology to prevent carbon dioxide (CO₂) emitted by facilities such as power plants and factories from being released into the atmosphere. The technology involves capturing the CO₂, injecting it into subsurface geological formations and storing it permanently. Along with energy efficiency and renewable energy, CCS is a key countermeasure against global warming.

How to store CO₂

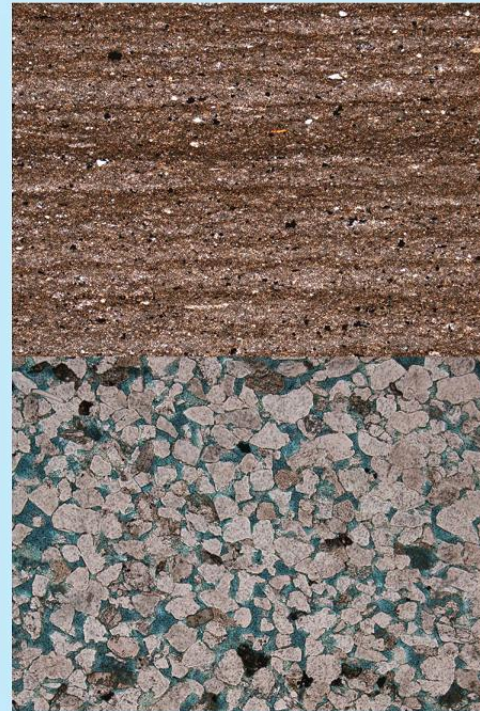

■ Features of Caprock

Mudstone etc., made of fine mud grains

- Impervious
- Sufficient blocking ability
- Covering reservoir layer widely and thickly


■ Features of Reservoir

Sandstone, volcanic rock, etc., made of coarse grains

- Sufficient pore spaces to store CO₂
- Pervious

In order to store CO₂ in the subsurface under the seabed, a geological structure where a reservoir is overlain by a cap rock is required. The cap rock blocks the leakage of injected CO₂ from the reservoir.

Flow Scheme of Tomakomai Demonstration Project

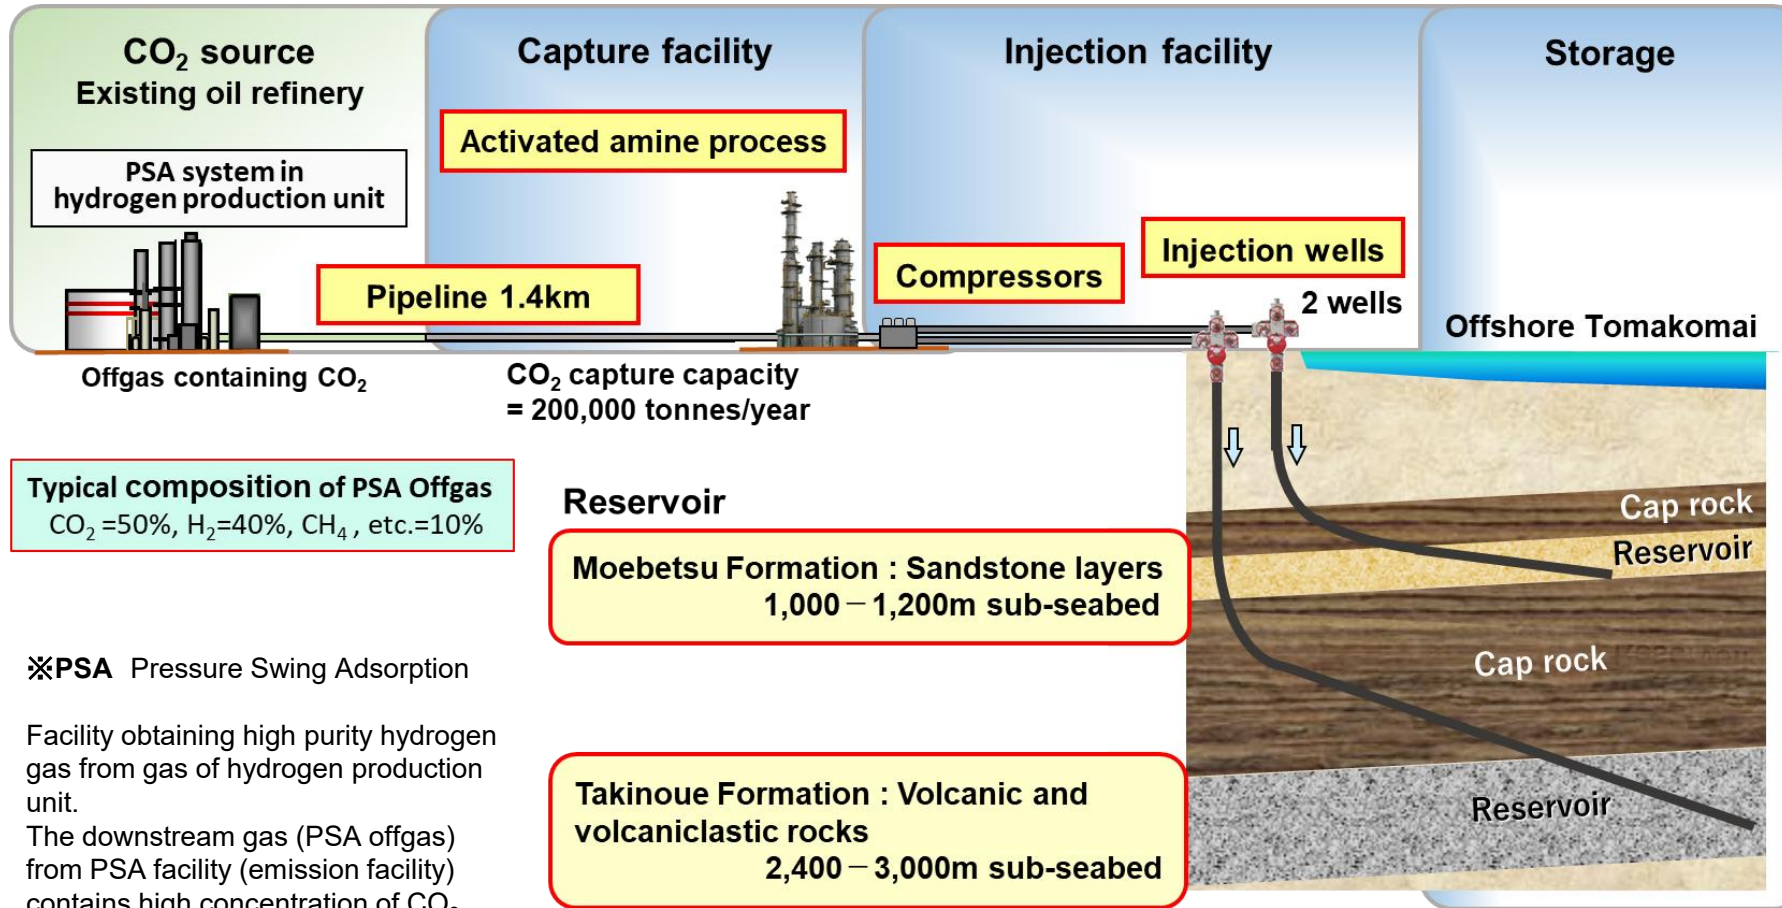

CO₂ is captured from offgas containing CO₂ generated by a hydrogen production unit of a refinery, pressurized (up to 23 MPa) to the pressure required for injection, injected at a scale of about 100,000 tonnes of CO₂ per year and stored in two sub-seabed reservoirs offshore Tomakomai.

Schedule of Tomakomai Demonstration Project (from JFY2012 -)

Contract Period: From JFY2012 -


■ From JFY2012 to JFY2015: Construction

Activities including the design and construction of facilities, drilling of wells, baseline monitoring, and preparation for demonstration operation were carried out.

■ From April 2016 to November 2019: CO₂ capture/injection (On November 22, 2019, the target of 300 thousand tonnes of CO₂ injection was achieved, and injection was terminated.)

■ From JFY2016: Monitoring of CO₂^(*) : being continued after termination of injection


■ From JFY2021 to JFY2024: Study/preparation of the interoperation of CCS and CCU

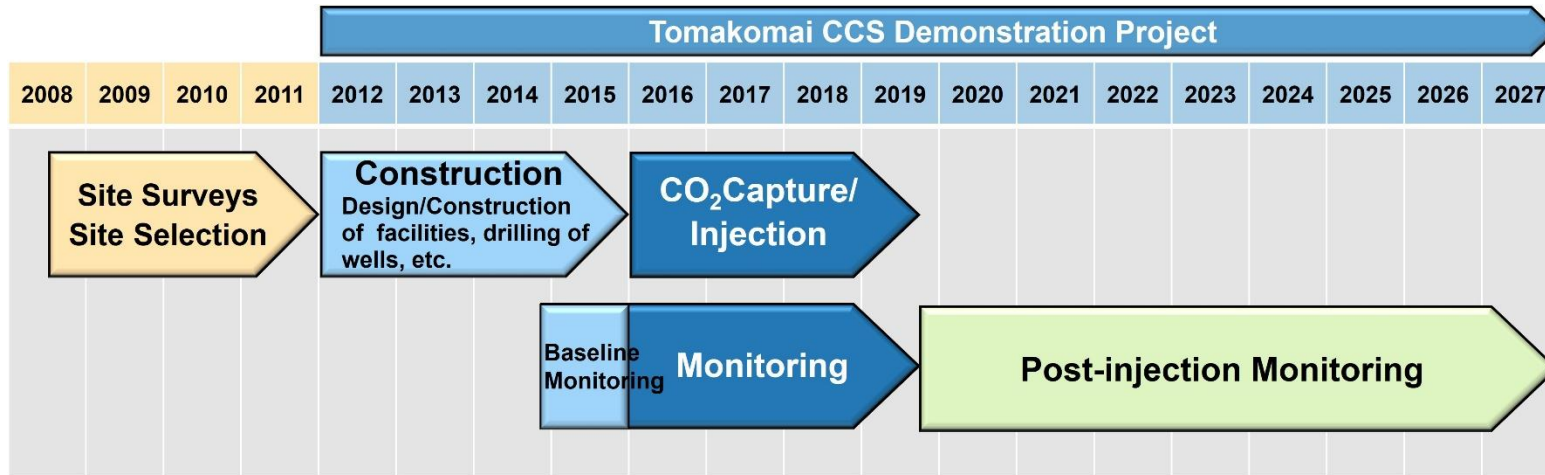

(*) Monitoring the behavior (migration, distribution) of the injected CO₂, continuous monitoring of micro-seismicity and natural earthquakes, marine environmental monitoring to detect for possible CO₂ leakage/seepage are being conducted.

※Years are in Japanese Fiscal Years (JFY: from April of calendar year to March of following year)


Positional Relation of Onshore Facilities

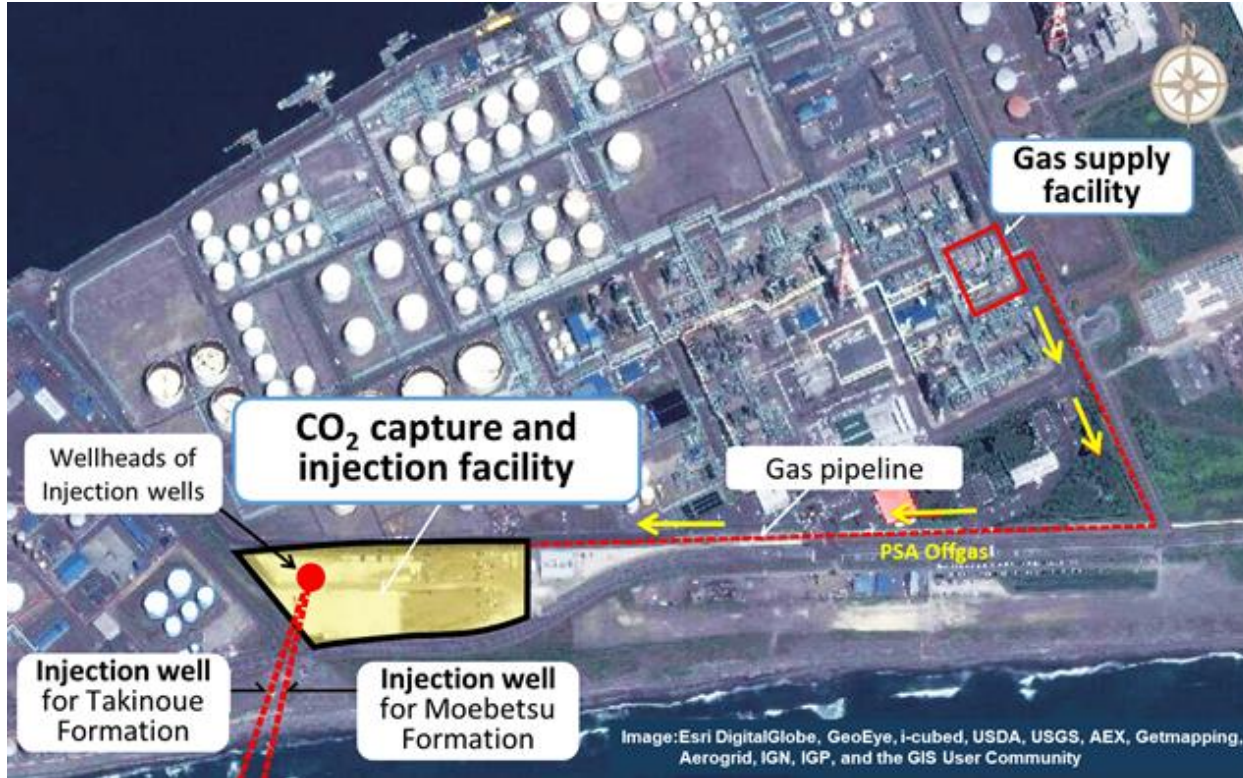

In the "Gas supply facility", PSA offgas (CO₂ containing gas) is generated in the hydrogen production process of the refinery and sent to the Tomakomai Project "CO₂ capture and injection facility" via a 1.4 km gas pipeline.

At the "CO₂ capture and injection facility", CO₂ is captured at purity of 99% or more from the PSA offgas sent through the Gas pipeline, pressurized by compressors, and injected by 2 injection wells into offshore sub-seabed reservoirs for storage.


Schematic Geological Section

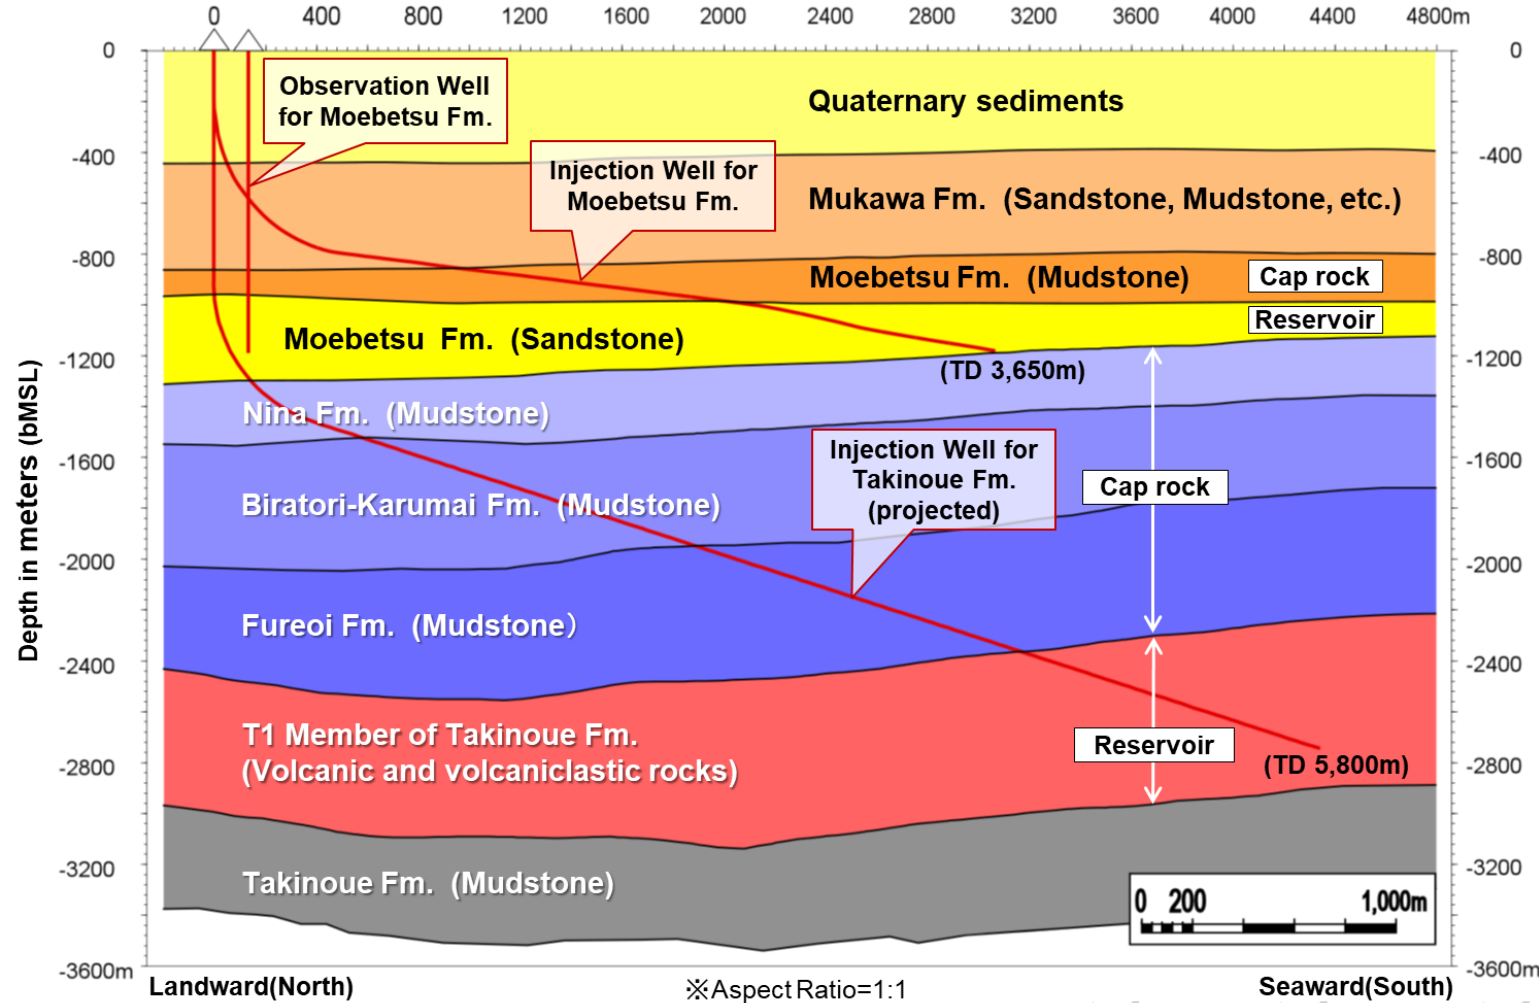

This is a schematic geological section showing how the CO₂ is injected by two injection wells extending to the two reservoirs, the Takinoue Formation T1 Member (volcanic rocks) and Moebetsu Formation (sandstone).

The Takinoue Formation injection well is a directional well with a total depth of 5,800m and maximum inclination of 72 degrees. The Moebetsu Formation injection well is a directional well with a total depth of 3,650m and maximum inclination of 83 degrees.

Bird's Eye View of Capture and Injection Facilities

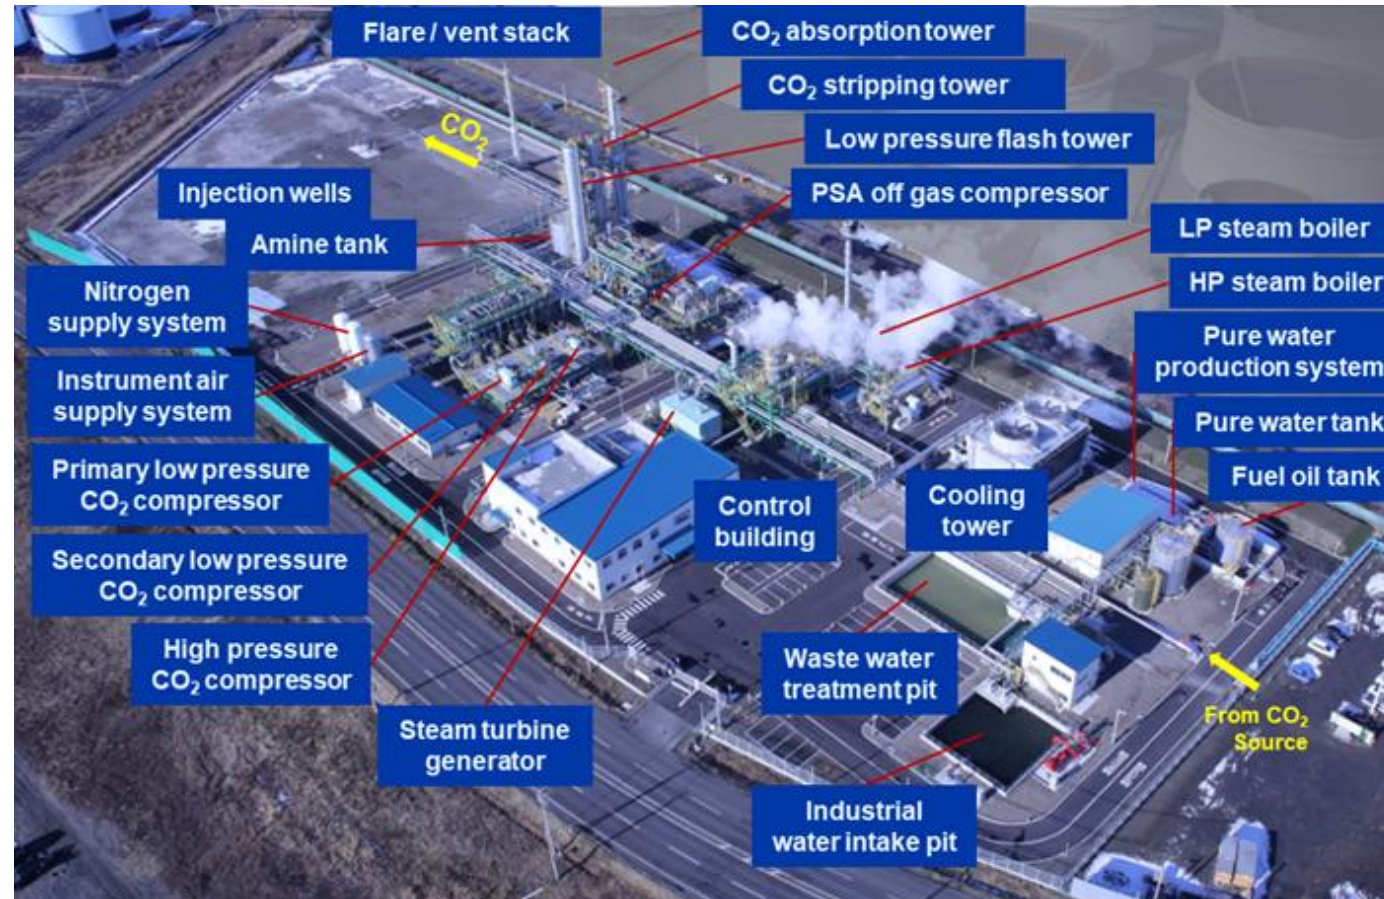

CO₂ Capture Facilities and Compressors



3 stage CO₂ Compressors

Increases pressure
of captured CO₂ to
the pressure
required for injection

CO₂ Capture Facility
Captures CO₂ from PSA
Offgas

CO₂ Injection Report

Injection was terminated on November 22, 2019.


Cumulative CO₂ Injection amount
(April 06, 2016~November 22, 2019)

300,110.3
tonnes


Injection Amount in November 2019

	Injection Amount/month (November 2019)	Cumulative CO ₂ Injection Amount (As of November 22)
Moebetsu Fm.	10,793.5 tonnes	300,012.2 tonnes
Takinoue Fm.	0.0 tonnes	98.2 tonnes

Change of cumulative CO₂ Injection Amount

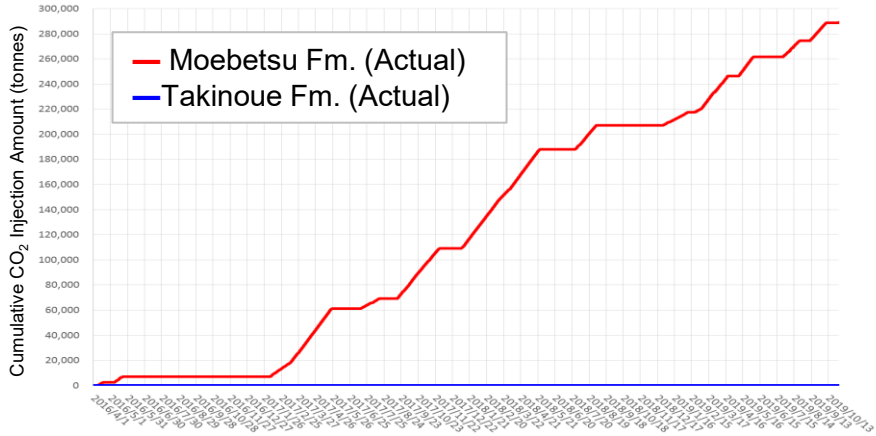

Layout of Monitoring Network

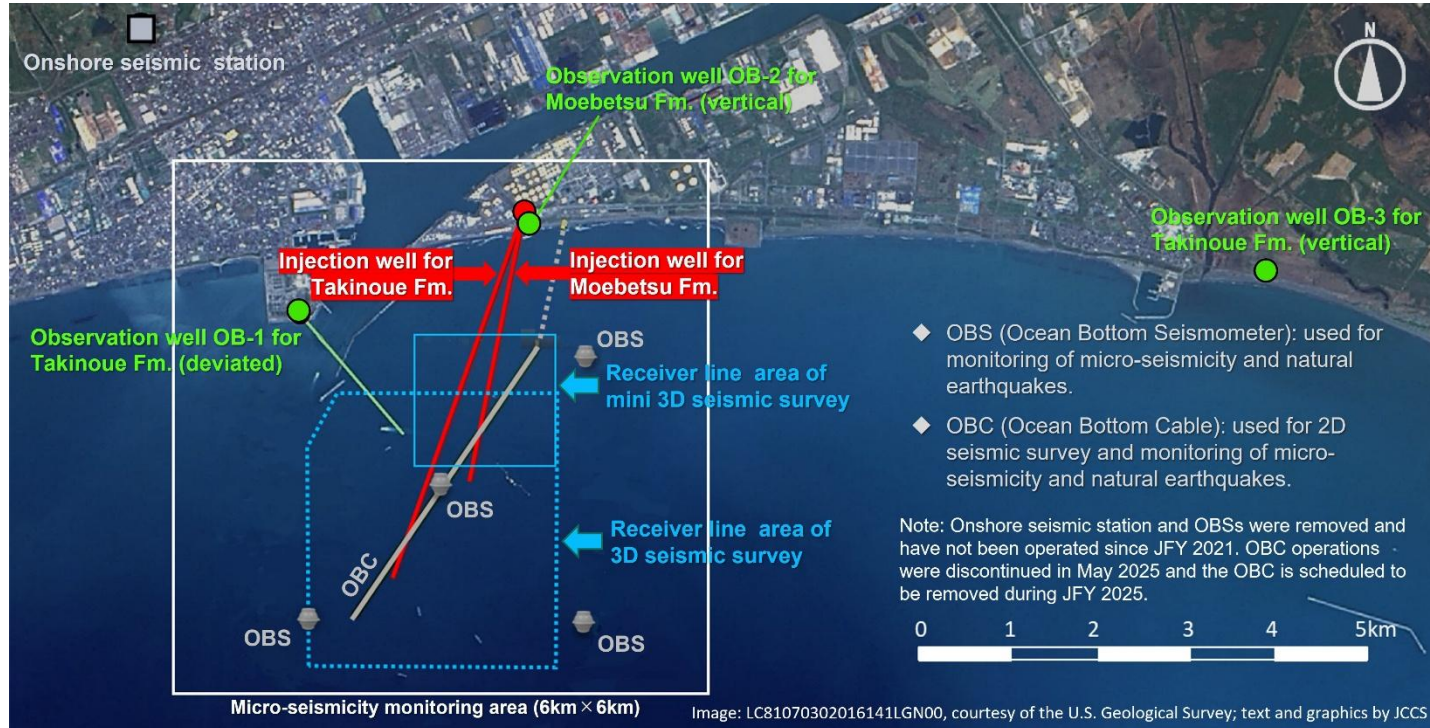


Note) Based on the results of an optimization study of the micro-seismicity monitoring system, the operation of the onshore seismic station and ocean bottom seismometers (OBS) was suspended in FY2021, and the operation of the permanent OBC was suspended in FY2025 (Suspended items are shown in gray). Micro-seismicity monitoring is currently being continued by the observation wells.


A monitoring network was constructed near and around the CO₂ injection point, and continuous monitoring over six years comprising before CO₂ injection (1 year), during CO₂ injection (3 years) and after termination of injection (over 6 years) is being carried out.

- The formation pressures and temperatures of the wells - observation wells (3 wells) drilled around the CO₂ injection point and CO₂ injection wells (2 wells) are being monitored.
- Seismometers were installed in the observation well and on the seabed to monitor earthquakes (including micro-seismicity - minute tremors that cannot be felt by humans).
- Observed data is controlled centrally at the Tomakomai Demonstration Center and continuous monitoring for the presence of abnormal conditions is being carried out.

Most recent perceptible earthquake observed in Tomakomai

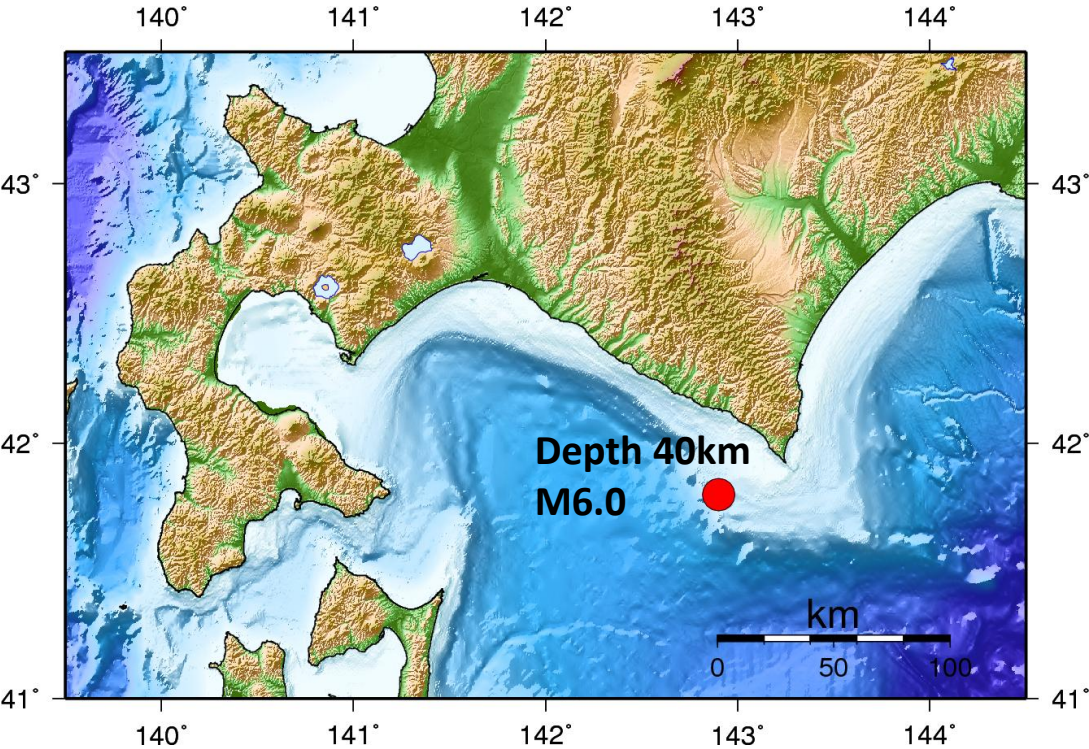


Geomorphic map is prepared from Geographical Survey Institute numerical map 250 m mesh (altitude) and Japan Marine Safety Agency 'Japan Oceanographic Data Center' 500 m mesh water depth data


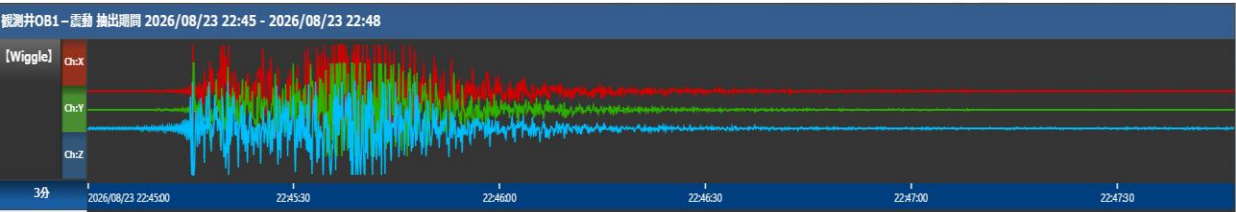


Earthquake Information	
Announced by the Japan Meteorological Agency	
Time & Date	22:45 (JST) 23 Aug, 2026
Hypocenter	Lat. 41° 48'N Lon. 142° 54'E Depth 40km
Magnitude	6.0
Seismic Intensity at Tomakomai-city	2


Distribution of Natural Earthquakes around Tomakomai

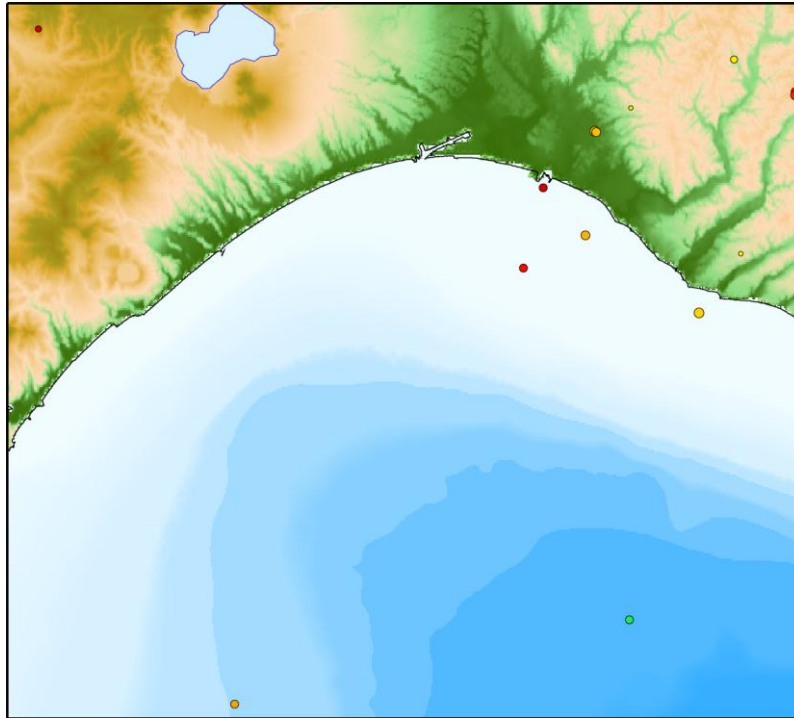

Natural earthquake hypocenter distribution in Aug 2026

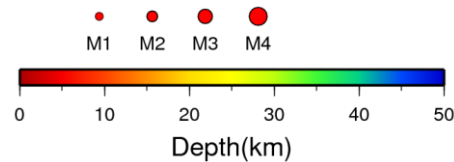

Geomorphic map is prepared from Geographical Survey Institute numerical map 250 m mesh (altitude) and Japan Marine Safety Agency 'Japan Oceanographic Data Center' 500 m mesh water depth data

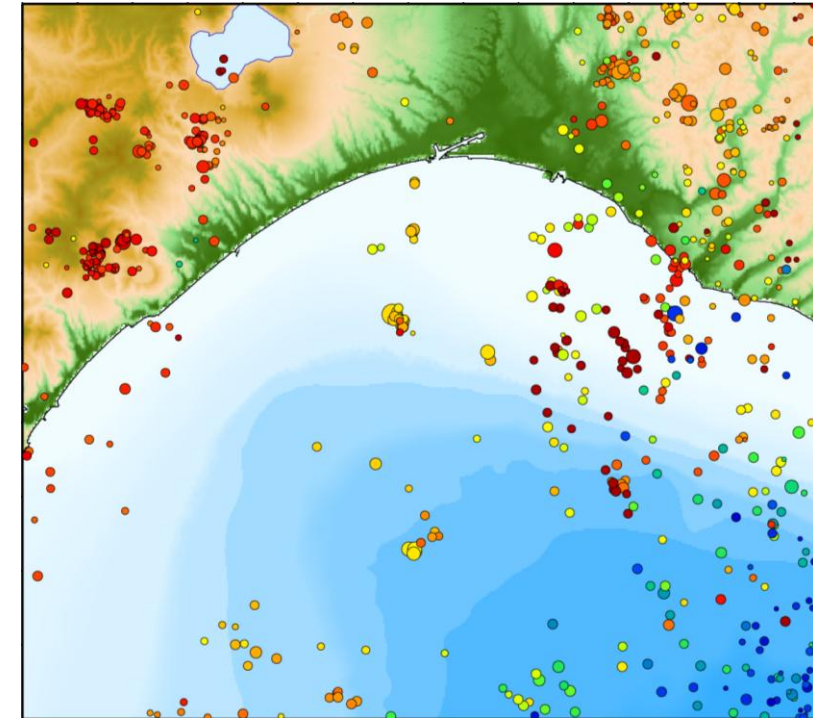


Natural earthquake hypocenter distribution occurred from 2001 to 2010


The hypocenters in the figure is from the JMA Unified Hypocenter Catalog.
Earthquakes with the hypocenter depth of 50 km or less are displayed.

Micro-seismic events nearby injection point



Pre-injection events (2015/2/1-2016/4/5)

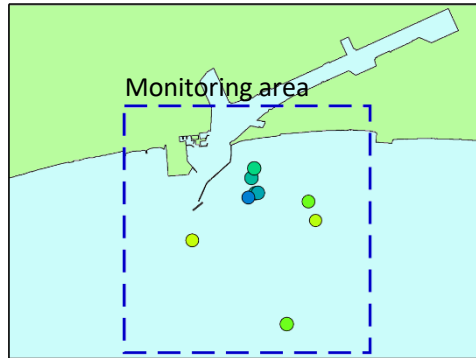

Events during CO₂ injection (2016/4/6-2019/11/22)

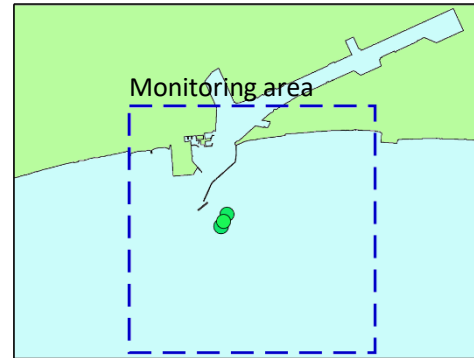


Post-injection events (2019/11/23-2026/5/31)

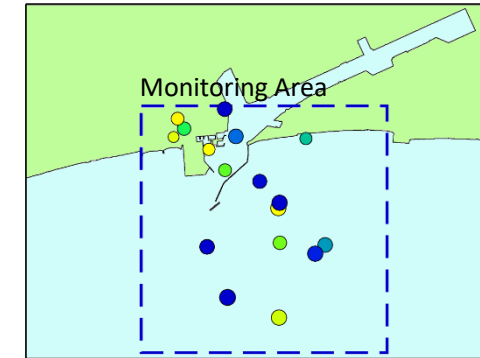







The left map is created based on the base map Information coastline data of Geospatial Information Authority of Japan.

Detection of micro-seismic events (weekly)






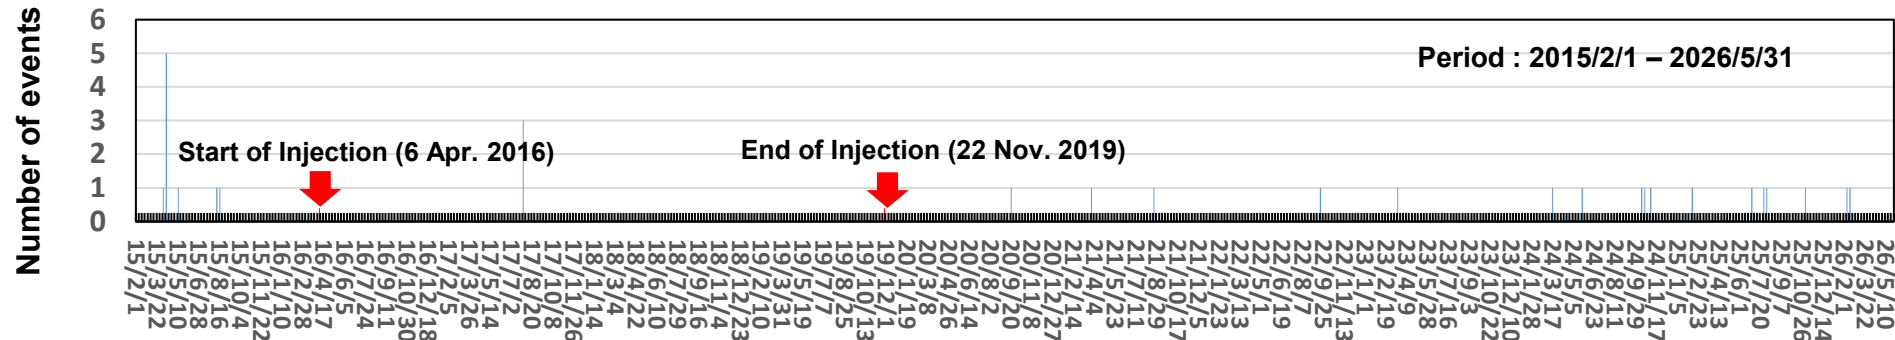


- There are perceptible earthquakes that can be felt, and imperceptible earthquakes that cannot be felt even though there are actual vibrations.
- In this project, particularly small (less than magnitude 1) imperceptible earthquakes are defined as micro-seismicity.
- In this project, micro-seismicity with a magnitude of -0.5 or more with a depth of less than 50 km in the vicinity of the injection point are monitored, due to restrictions on the placement of observation points, and constraints on seismograph detection capability, etc.


Observation of pressure in the wells (Aug 2026)

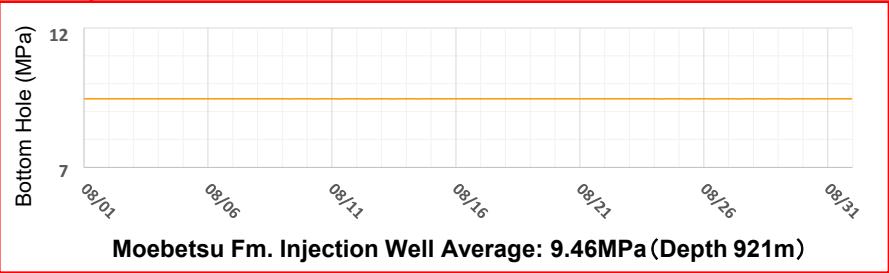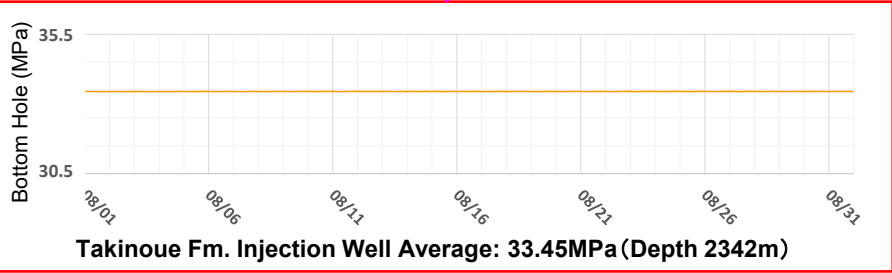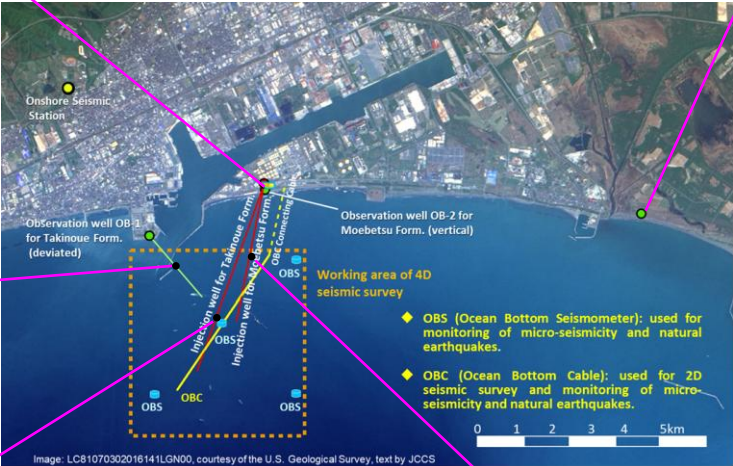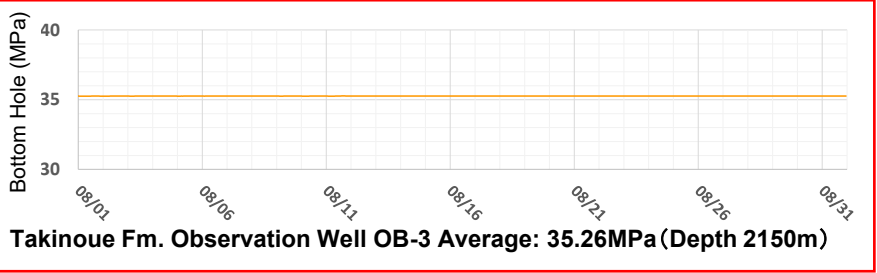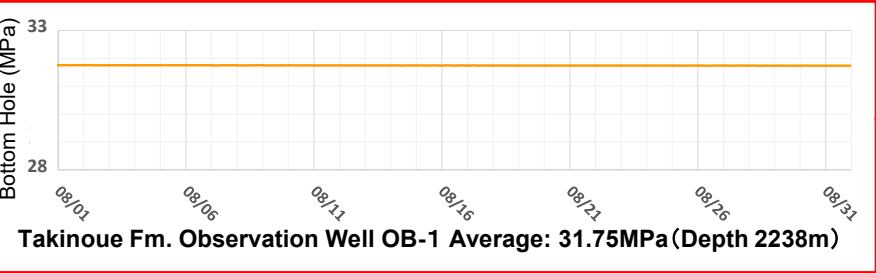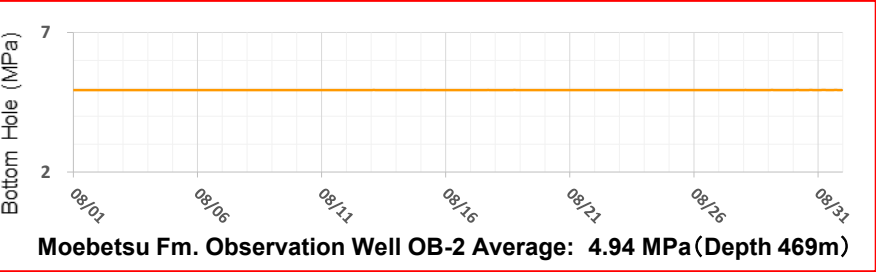

Observation of temperature in the wells (Aug 2026)

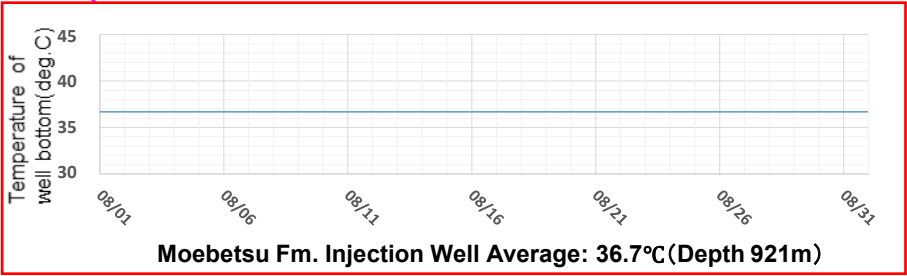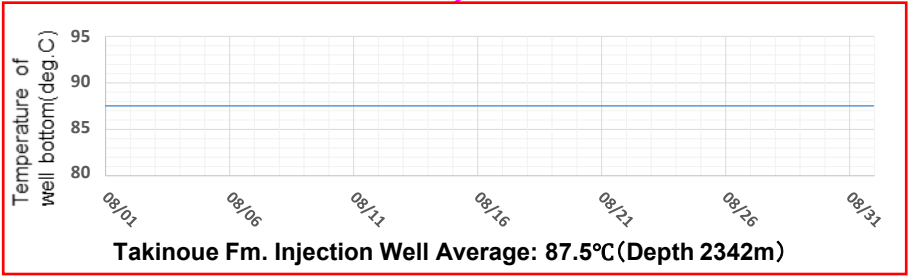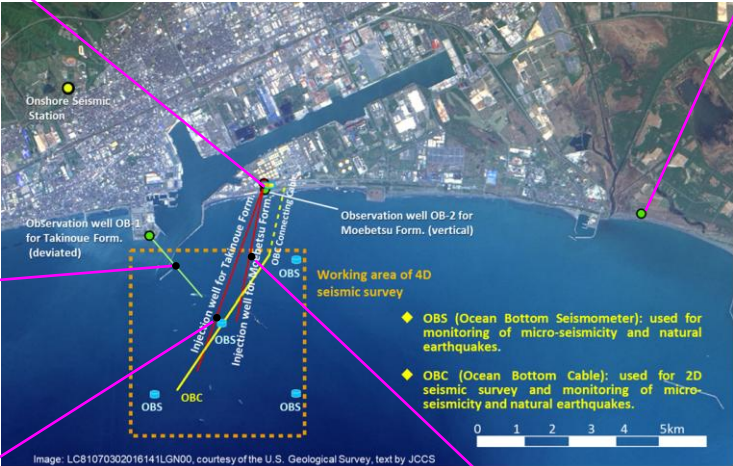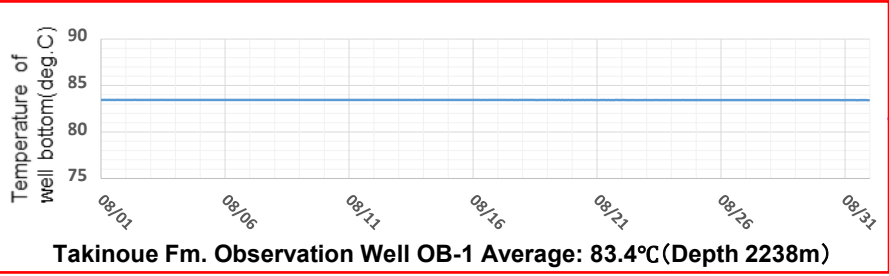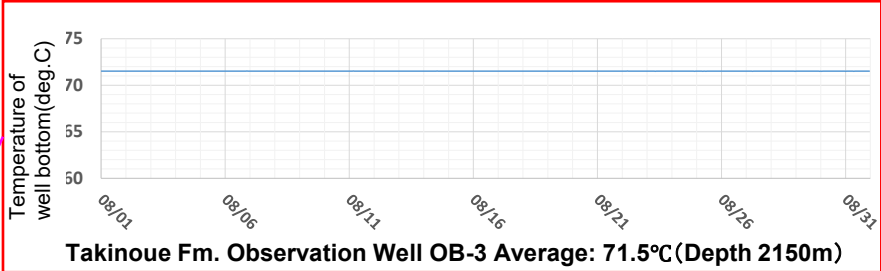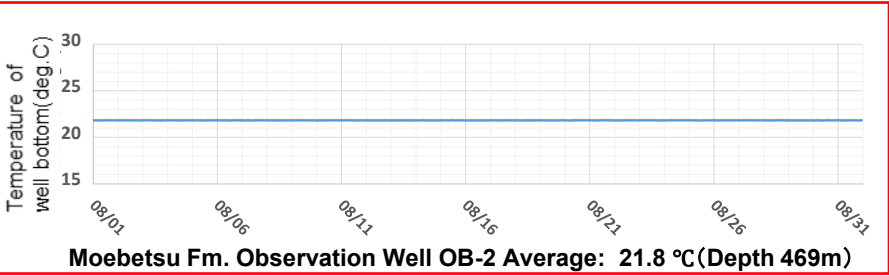

CO₂ Concentration around injection point(seasonal)

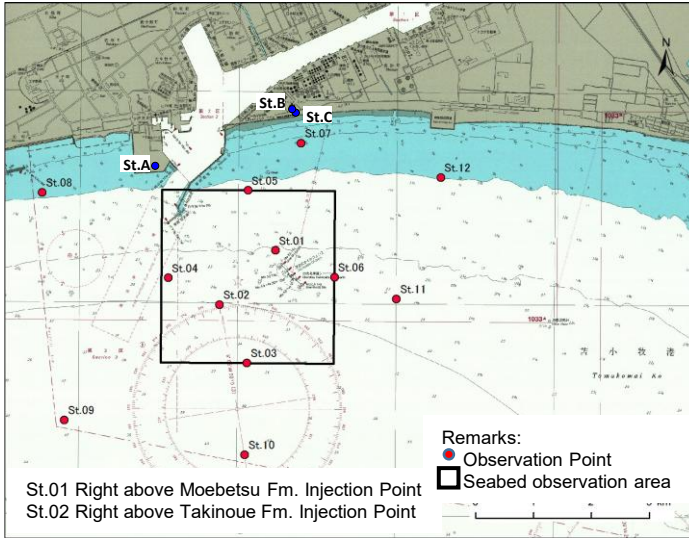

Cruise to the Japan Coast Guard issue navigation chart (W1034)

Seasonal observation of CO₂ concentration is conducted at three onshore points (St.A to C) and 12 offshore points (St.01 to 12). The concentration of CO₂ is indicated as Volume ratio (unit: volppm) at the onshore observation points, and as partial pressure (unit: μ atm) at the offshore points. The figures of the offshore points are based on the measurement at 2 meters above the seabed.

