

Japan CCS gave a fun class at the 4th "Let's learn SDGs!" ~ held at Toyota Corolla Tomakomai.

An environmental event on the theme of SDGs and decarbonization was held with the cooperation of companies in Tomakomai City. After an introduction of "Global Warming and CCS" with cartoons, we had the students experience how CCS works using a demonstration model.



Date: August 7, 2025 at Toyota Corolla Tomakomai

- Hosted by The Hokkaido Shimbun Press
- Co-hosted by Toyota Corolla Tomakomai Inc.
- Cooperation by Toyota Motor Hokkaido Inc., Japan CCS Co., Ltd., Tomasei Holdings Co., Ltd., Tomakomai Police Station
- Supported by Tomakomai City, Tomakomai Board of Education



What's New

Japan CCS exhibited a booth at "Kankyo Hiroba Sapporo 2025" on July 25 (Sat) and 26 (Sun).



Families enjoying our booth



Thank you very much for visiting our booth.




A model explaining CCS was very popular among children.

1-2/19

Carbon dioxide (CO₂) is the most significant greenhouse gas contributing to global warming

Time-series representation of Globally Averaged CO₂ Mole Fractions

The global mean annual atmospheric CO_2 mole fraction was 420.0 ppm in 2023, an increase of 2.3 ppm from the previous year. This is 51% higher than the pre-industrial level (about 278 ppm).

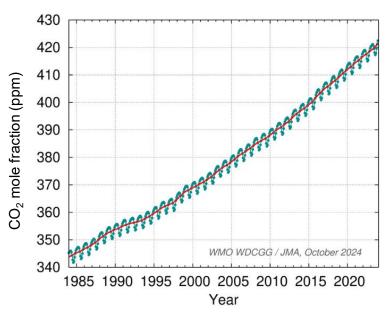


Blue: monthly mean concentration

Red: monthly mean with seasonal variations removed

Source: Japan Meteorological Agency "Globally averaged mole fractions" (updated on March 25, 2025); as modified by Japan CCS Co., Ltd. https://www.data.jma.go.jp/ghg/kanshi/ghgp/co2_e.html

Annual anomalies of Global Average Surface Temperature

The global average surface temperature is rising while repeatedly experiencing various fluctuations. In particular, since the mid-1990s, there has been an increasing number of years with high temperatures.

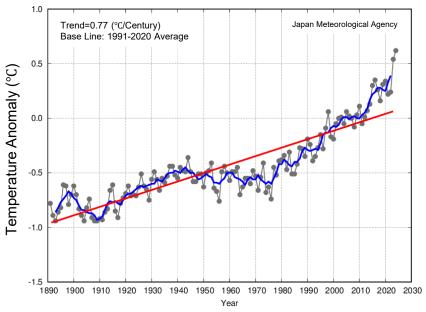


Black thin line: surface temperature anomaly of each year

Blue line: 5-year running mean Red line: long-term linear trend

Source: Japan Meteorological Agency "Global Average Surface Temperature Anomalies"; as modified by Japan CCS Co., Ltd. https://www.data.jma.go.jp/tcc/tcc/products/gwp/temp/ann_wld.html

Potential of CO₂ reduction by CCUS

 CO₂ capture amount based on Net Zero Emissions by 2050 Scenario (NZE Scenario)

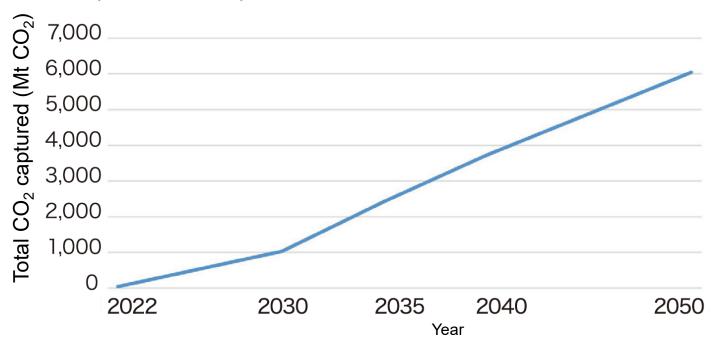


According to the IEA (International Energy Agency), to achieve net zero by 2050, the amount of CO₂ that will need to be captured globally by CCUS is estimated to be approximately 6 billion tonnes per year at that point.

Source: IEA Net Zero Roadmap 2023 "Table A. 4: World CO2 emissions"; as modified by Japan CCS Co., Ltd.

What is CCS?



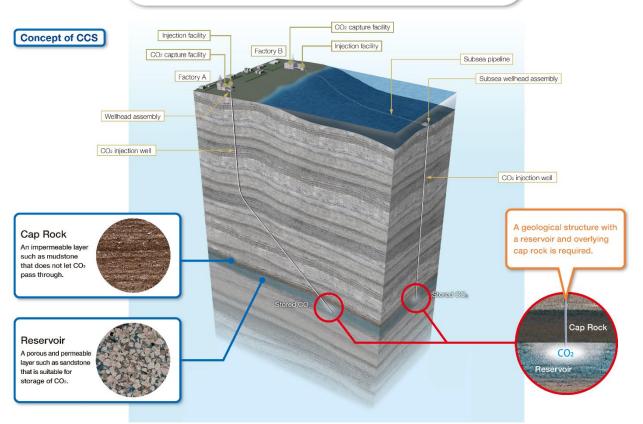

CCS is a technology to prevent carbon dioxide (CO₂) emitted by facilities such as power plants and factories from being released into the atmosphere. The technology involves capturing the CO₂, injecting it into subsurface geological formations and storing it permanently. Along with energy efficiency and renewable energy, CCS is a key countermeasure against global warming.

How to store CO₂



■Features of Caprock

Mudstone etc., made of fine mud grains

- Impervious
- · Sufficient blocking ability
- Covering reservoir layer widely and thickly

■Features of Reservoir


Sandstone, volcanic rock, etc., made of coarse grains

- Sufficient pore spaces to store CO₂
- Pervious

In order to store CO_2 in the subsurface under the seabed, a geological structure where a reservoir is overlain by a cap rock is required. The cap rock blocks the leakage of injected CO_2 from the reservoir.

tonnes

Flow Scheme of Tomakomai Demonstration Project

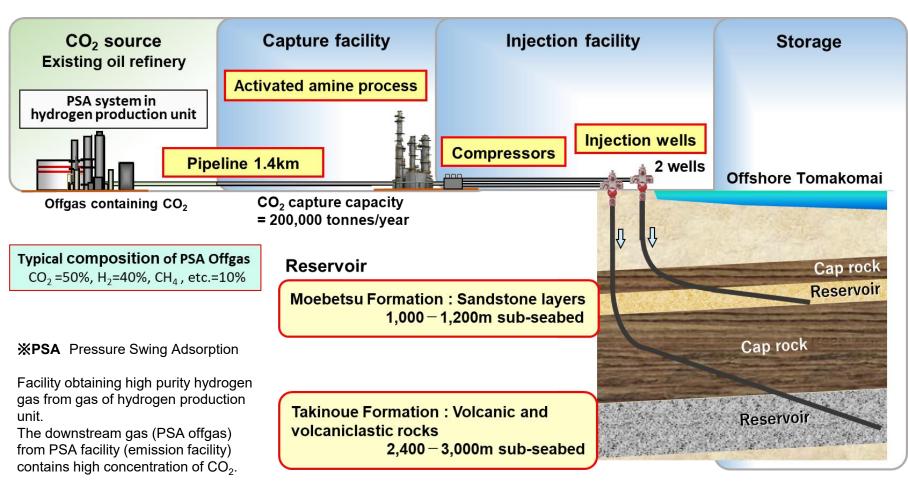

CO₂ is captured from offgas containing CO₂ generated by a hydrogen production unit of a refinery, pressurized (up to 23 MPa) to the pressure required for injection, injected at a scale of about 100,000 tonnes of CO₂ per year and stored in two sub-seabed reservoirs offshore Tomakomai.

On November 22, 2019, CO₂ injection was terminated.

Cumulative CO₂ Injection amount

300,110.3

tonnes


Schedule of Tomakomai Demonstration Project (from JFY2012 -)

Contract Period: From JFY2012 to JFY2026

From JFY2012 to JFY2015: Preparation

Activities including the design and construction of facilities, drilling of wells, and preparation for demonstration operation were carried out.


- From April 2016 to November 2019: CO₂ injection (On November 22, 2019, the target of 300 thousand tonnes of CO₂ injection was achieved, and injection was terminated.)
- From JFY2016: Monitoring of CO₂(*); being continued.
- From November 2019: Maintenance of facilities, improvement of capability, etc.
- From JFY2021: Study/preparation of the interoperation of CCS and CCU

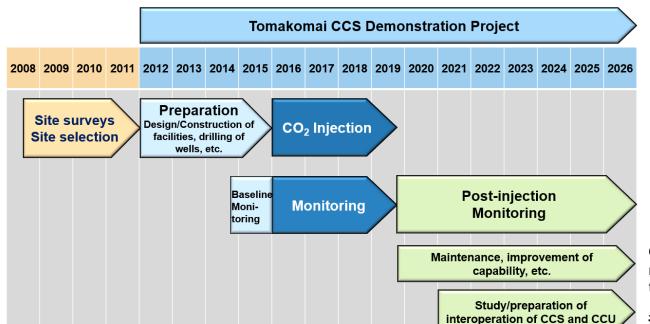

^(*) Monitoring the behavior (migration, distribution) of the injected CO₂, continuous monitoring of micro-seismicity and natural earthquakes, marine environmental monitoring to detect for possible CO₂ leakage/seepage are being conducted.

*Years are Japanese Fiscal Years (April to March)

Positional Relation of Onshore Facilities

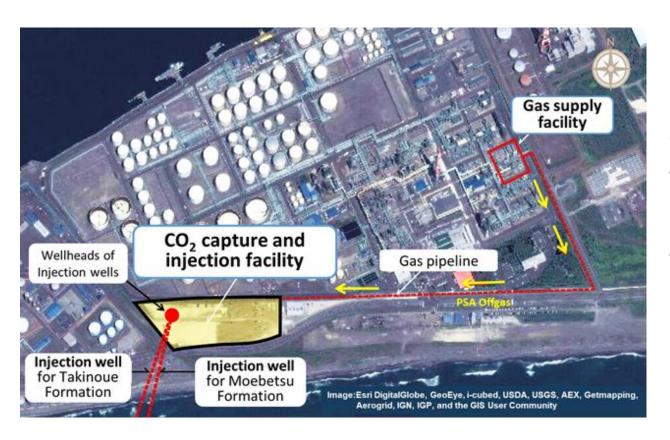


In the "Gas supply facility", PSA offgas (CO₂ containing gas) is generated in the hydrogen production process of the refinery and sent to the Tomakomai Project "CO₂ capture and injection facility" via a 1.4 km gas pipeline.

At the "CO₂ capture and injection facility", CO₂ is captured at purity of 99% or more from the PSA offgas sent through the Gas pipeline, pressurized by compressors, and injected by 2 injection wells into offshore sub-seabed reservoirs for storage.

tonnes

Schematic Geological Section

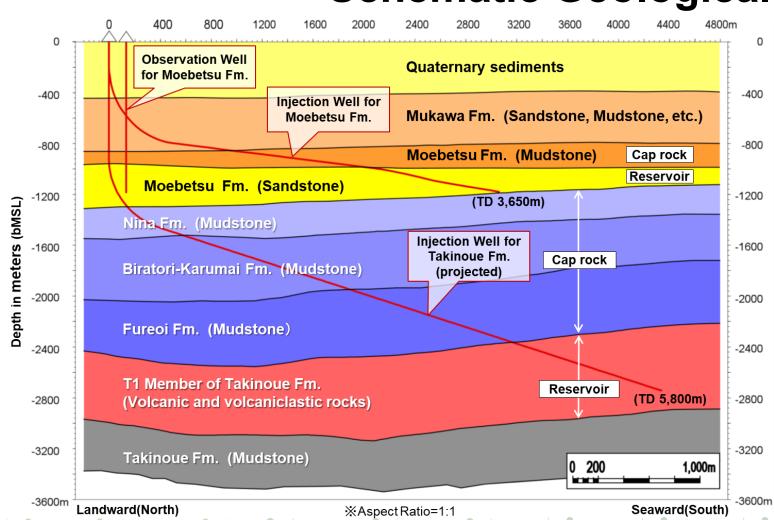


This is a schematic geological section showing how the CO₂ is injected by two injection wells extending to the two reservoirs, the Takinoue Formation T1 Member (volcanic rocks) and Moebetsu Formation (sandstone).

The Takinoue Formation injection well is a directional well with a total depth of 5,800m and maximum inclination of 72 degrees. The Moebetsu Formation injection well is a directional well with a total depth of 3,650m and maximum inclination of 83 degrees.

tonnes

Bird's Eye View of Capture and Injection Facilities

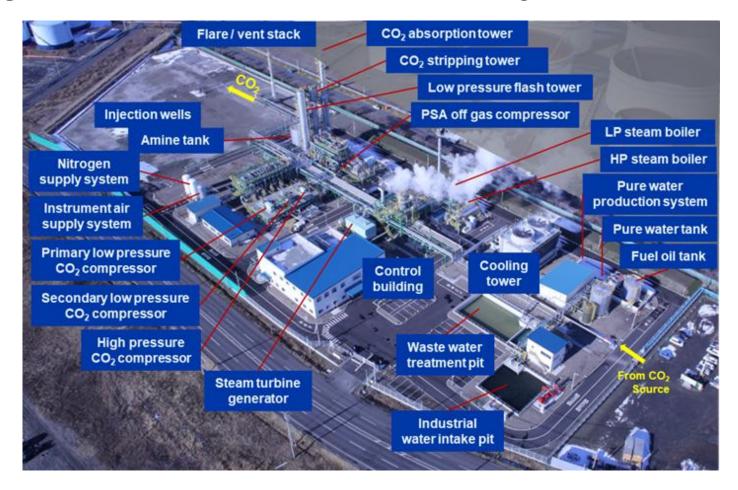

3 stage CO₂

the pressure

Compressors

Increases pressure of captured CO₂ to

required for injection

On November 22, 2019, CO₂ injection was terminated.

Cumulative CO₂ Injection amount

300,110.3

tonnes

CO₂ Capture Facilities and Compressors



CO₂ Capture Facility
Captures CO₂ from PSA
Offgas

tonnes

CO₂ Injection Report

Injection was terminated on November 22, 2019.

Cumulative CO₂ Injection amount (April 06, 2016~November 22, 2019)


300,110.3

tonnes

Injection Amount in November 2019


	Injection Amount/month (November 2019)	Cumulative CO ₂ Injection Amount (As of November 22)
Moebetsu Fm.	10,793.5 tonnes	300,012.2 tonnes
Takinoue Fm.	0.0 tonnes	98.2 tonnes

Change of cumulative CO₂ Injection Amount

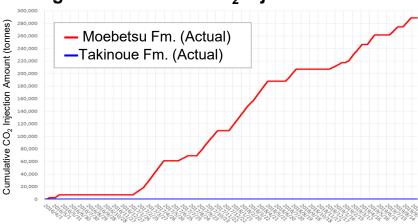

tonnes

Layout of Monitoring Network

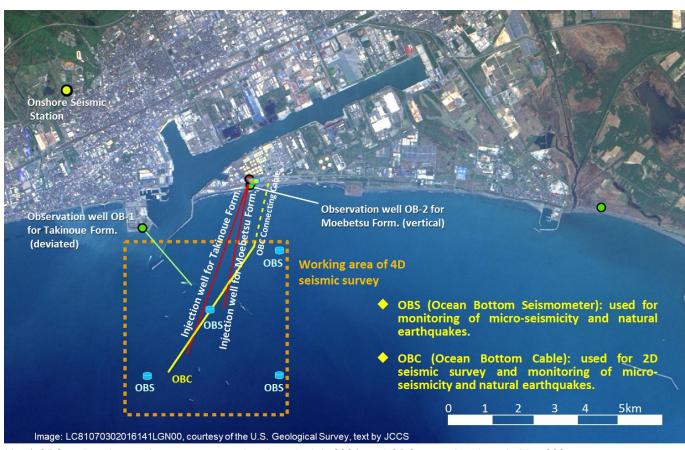


A monitoring network was constructed near and around the CO_2 injection point, and continuous monitoring over six years comprising before CO_2 injection (1 year), during CO_2 injection (3 years) and after termination of injection (over 6 years) is being carried out.

- ➤ The formation pressures and temperatures of the wells - observation wells (3 wells) drilled around the CO₂ injection point and CO₂ injection wells (2 wells) are being monitored.
- Seismometers were installed in the observation well and on the seabed to monitor earthquakes (including micro-seismicity - minute tremors that cannot be felt by humans).
- Observed data is controlled centrally at the Tomakomai Demonstration Center and constant monitoring for the presence of abnormal conditions is carried out.


Note) OBS and onshore seismometer were shut down in July 2021, and OBC were shut down in May 2025.

Most recent perceptible earthquake observed in Tomakomai

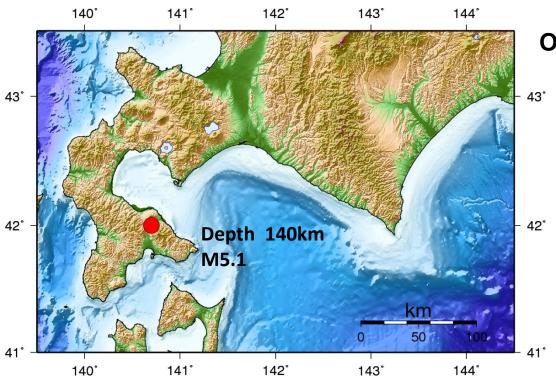


Geomorphic map is prepared from Geographical Survey Institute numerical map 250 m mesh (altitude) and Japan Marine Safety Agency 'Japan Oceanographic Data Center' 500 m mesh water depth data

Observation record of Seismometer in Observation Well





Earthquake Information Announced by the Japan Meteorological Agency		
Time & Date	Date 07:19 (JST) 19 Aug, 2025	
Hypocenter	Lat. 42° 0'N Lon. 140° 42'E Depth 140km	
Magnitude	5.1	
Seismic Intensity at Tomakomai-city	1	


Distribution of Natural Earthquakes around Tomakomai

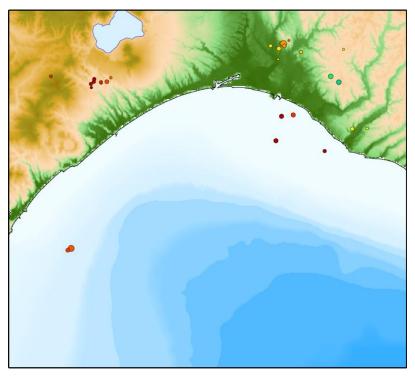

Natural earthquake hypocenter distribution in Aug 2025





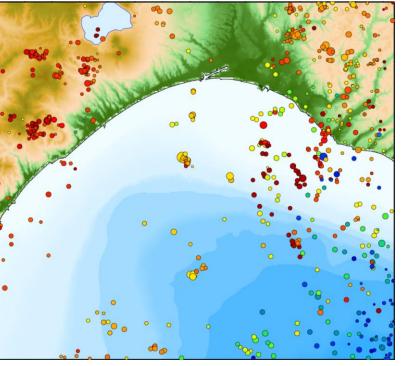

Natural earthquake hypocenter distribution occurred from 2001 to 2010

The hypocenters in the figure is from the JMA Unified Hypocenter Catalog. Earthquakes with the hypocenter depth of 50 km or less are displayed.

Geomorphic map is prepared from Geographical Survey Institute numerical map 250 m mesh (altitude) and Japan Marine Safety Agency 'Japan Oceanographic Data Center' 500 m mesh water depth data

Number of

On November 22, 2019, CO₂ injection was terminated.


Cumulative CO₂ Injection amount

300,110.3


tonnes

Micro-seismic events nearby injection point


Pre-injection events (2015/2/1-2016/4/5)



Events during CO₂ injection (2016/4/6-2019/11/22)




Post-injection events (2019/11/23-2025/8/31)

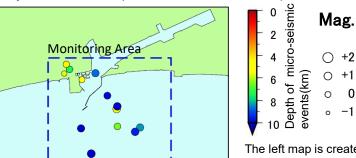

The left map is created based on the base map Information coastline data of Geospatial Information Authority of Japan.


Detection of microseismic events (weekly)

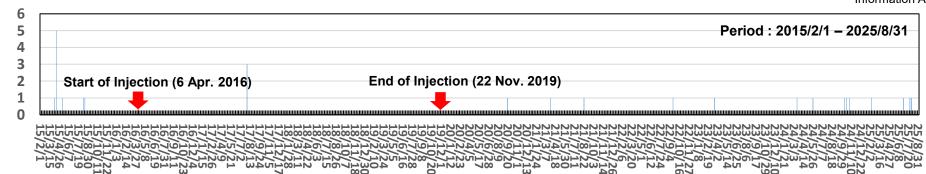


- There are perceptible earthquakes that can be felt, and imperceptible earthquakes that cannot be felt even though there are actual vibrations.
- In this project, particularly small (less than magnitude 1) imperceptible earthquakes are defined as micro-seismicity.
- In this project, micro-seismicity with a magnitude of -0.5 or more with a depth of less than 50 km in the vicinity of the injection point are monitored, due to restrictions on the placement of observation points, and constraints on seismograph detection capability, etc.

tonnes


Observation of pressure in the wells (Aug 2025)

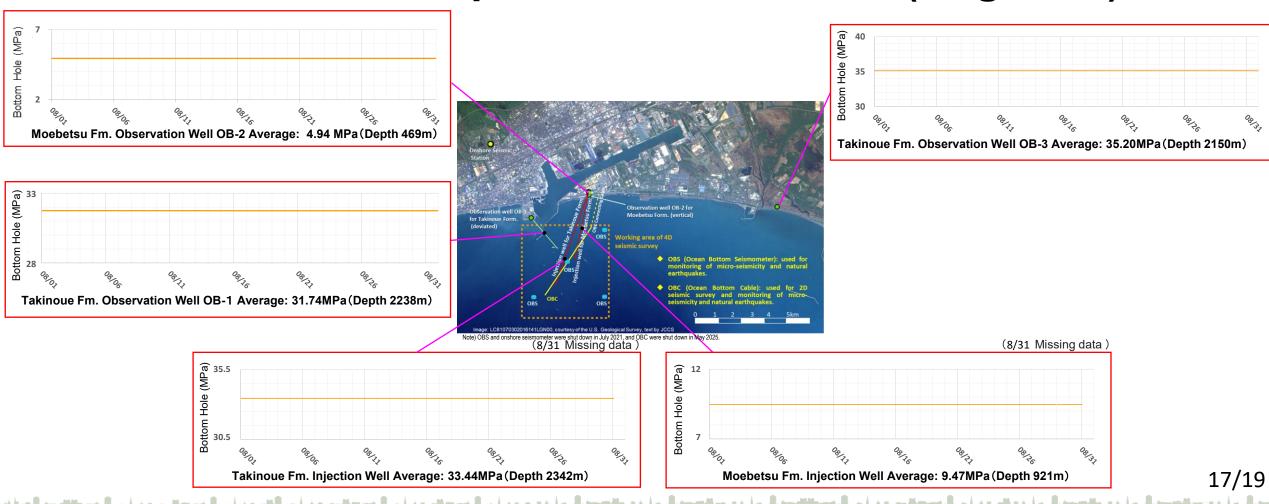

Observation of temperature in the wells (Aug 2025)

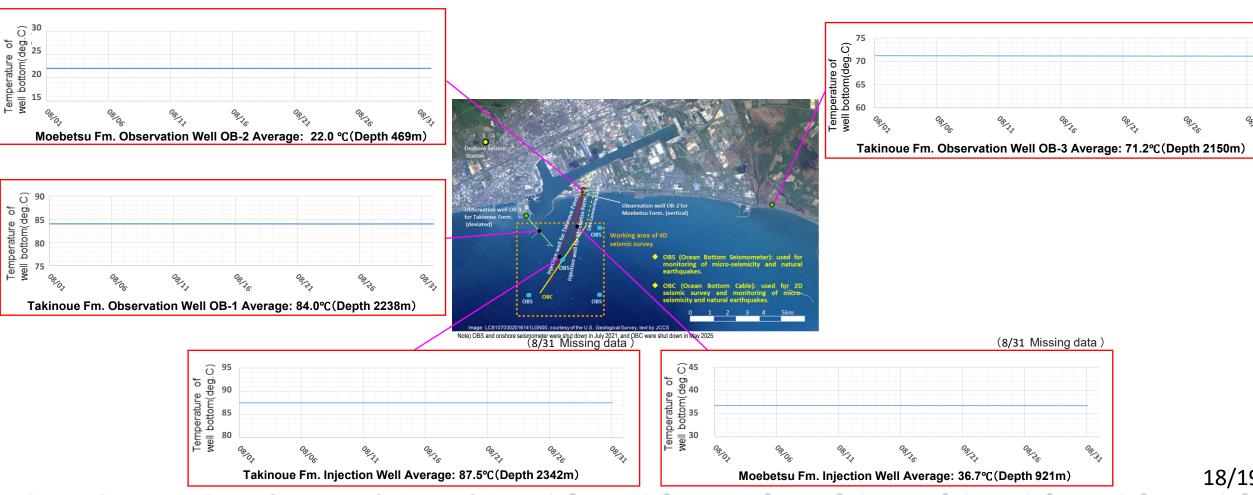

CO₂ Concentration around injection point (seasonal)

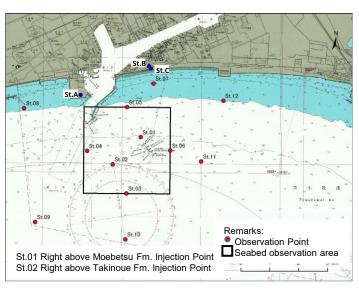

Cruise to the Japan Coast Guard issue navigation chart (W1034)

Seasonal observation of CO_2 concentration is conducted at three onshore points (St.A to C) and 12 offshore points (St.01 to 12). The concentration of CO_2 is indicated as Volume ratio (unit: volppm) at the onshore observation points, and as partial pressure (unit: μ atm) at the offshore points. The figures of the offshore points are based on the measurement at 2 meters above the seabed.

